

Datenblatt für Artikel: NLAMCCE03W

Emerg. Lumin. AM WirelessControl 3h 230VAC rope recessed

Stainless steel look, Viewing distance: 22m, Cord suspension: standard length 1500mm (shortenable), radio switchable




Technische Daten

Netto lengte (mm)	241,00
Breedte (mm)	80,00
Hoogte (mm)	214,00
Nettogewicht (kg)	1,15
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessControl Professional
Productgroep	Ring licht
Design	AM
Kleur	RVS afwerking
Pictogrammen	Set pictogrammen (pijl links, rechts, onder, boven en folie wit) conform ISO 7010
Detectie afstand (m)	22

Technische Daten - Fortsetzung

Autonomietijd (h)	3
Lichtmiddel	LED (2W)
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Continu vermogen (W)	3,50
Standby vermogen (W)	0,80
Maximaal vermogen (W)	4,70
Type batterij (V/Ah)	LiFePO4 2x 3,2V/ 1,2Ah
Beschermingsgraad	IP40
Slagvastheid	$\geq IK03$
Bevestiging	Kabelmontage
Omgevingstemperatuur min. ($^{\circ}\text{C}$)	-5
Omgevingstemperatuur max. ($^{\circ}\text{C}$)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Dimensions (mm)

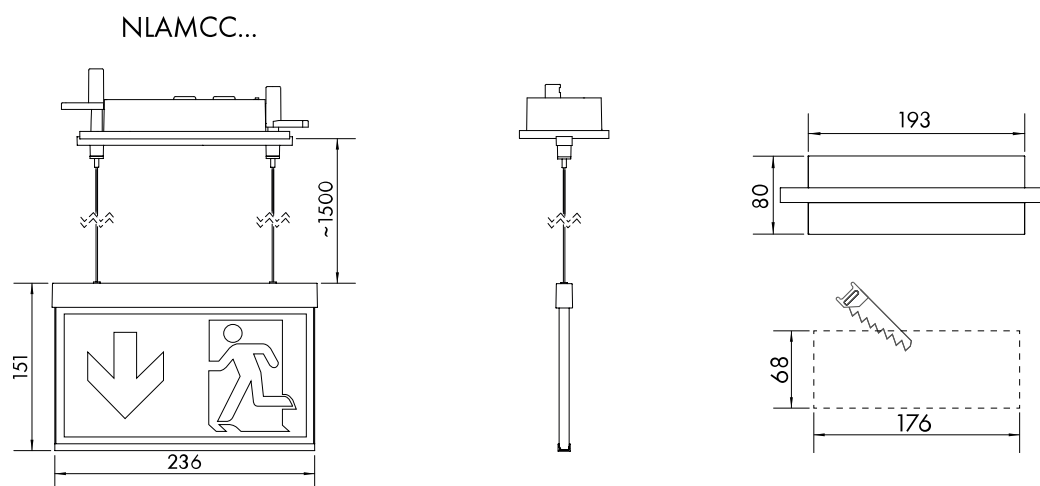

BEZEICHNUNG	BEST.NR.
Emerg. Lumin. AM WirelessControl 3h 230VAC rope recessed	NLAMCCE03W
Stainless steel look, Viewing distance: 22m, Cord suspension: standard length 1500mm (shortenable), radio switchable	

Optionele toebehoren

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Optionele toebehoren	
Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTLO
Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS	
Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTU
Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS	
Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTRO
Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS	
Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTRU
Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS	
KS, AM, KB Pictogrammen brandbestrijdingsmiddelen	NLKS4FIRE
Set pictogrammen volgens ISO7010 (brandblusser, brandslang, branddetector, middelen en apparaten voor brandbestrijding)	
KS, AM, KB Pictogrammen eerste hulp	NLKS4HELP
Set pictogrammen volgens ISO7010 (eerste hulp, verzamelpunt, defibrillator, nooduitgang met ladder)	
AM/AX Inbouwbehuizing beton	NLAMAXBE
Set 2 accus LiFePO4 3,2V 1,2Ah f. WirelessControl lum. w.LEO	NLAKKU321L
LiFePO4 - Lithium-iron phosphat battery , UN3480 - UN 3480 : Lithium-Ion batteries	
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV