

Datenblatt für Artikel: NLAMDCA03W

Emerg. luminaire AM WirelessControl 3h 230VAC rope surface

Anthracite, LiFeP04 battery, viewing distance: 22m, Cord suspension: standard length 1500mm (shortenable), radio switchable




Technische Daten

Netto lengte (mm)	241,00
Breedte (mm)	80,00
Hoogte (mm)	193,00
Nettogewicht (kg)	1,15
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessControl Professional
Productgroep	Ring licht
Design	AM
Kleur	RAL 7016
Pictogrammen	Set pictogrammen (pijl links, rechts, onder, boven en folie wit) conform ISO 7010
Detectie afstand (m)	22

Technische Daten - Fortsetzung

Autonomietijd (h)	3
Lichtmiddel	LED (2W)
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Continu vermogen (W)	3,50
Standby vermogen (W)	0,80
Maximaal vermogen (W)	4,70
Type batterij (V/Ah)	LiFePO4 2x 3,2V/ 1,2Ah
Beschermingsgraad	IP40
Slagvastheid	$\geq$ IK03
Bevestiging	Kabelmontage
Omgevingstemperatuur min. ($^{\circ}$ C)	-5
Omgevingstemperatuur max. ($^{\circ}$ C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Dimensions (mm)

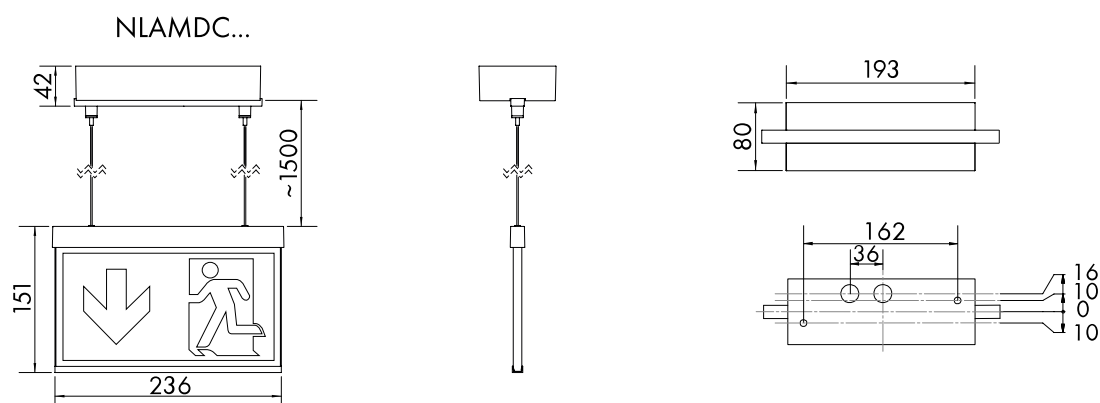

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emerg. luminaire AM WirelessControl 3h 230VAC rope surface Anthracite, LiFePO4 battery, viewing distance: 22m, Cord suspension: standard length 1500mm (shortenable), radio switchable	NLAMDCA03W
Optionele toebehoren	
Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTLO
Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTLU
Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTRO
Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTRU
KS, AM, KB Pictogrammen brandbestrijdingsmiddelen Set pictogrammen volgens ISO7010 (brandblusser, brandslang, branddetector, middelen en apparaten voor brandbestrijding)	NLKS4FIRE
Set 2 accus LiFePO4 3,2V 1,2Ah f. WirelessControl lum. w.LEO LiFePO4 - Lithium-iron phosphat battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU321L
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV