

Self-contained luminaire AM LED 3h 230V AC rope surface

stainless steel look, viewing distance: 22m, 1h/3h/8h adjustable, cord suspension: standard length 1500mm (shortenable), LiFePO4 battery




Technische Daten

Netto lengte (mm)	241,00
Breedte (mm)	80,00
Hoogte (mm)	193,00
Nettogewicht (kg)	1,15
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	Noodverlichting met autotest
Productgroep	Ring licht
Design	AM
Kleur	RVS afwerking
Pictogrammen	Set pictogrammen (pijl links, rechts, onder, boven en folie wit) conform ISO 7010
Detectie afstand (m)	22

Technische Daten - Fortsetzung

Lichtmiddel	LED (2W)
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Continu vermogen (W)	3,30
Standby vermogen (W)	0,90
Maximaal vermogen (W)	4,20
Type batterij (V/Ah)	LiFePO4 2x 3,2V/ 1,2Ah
Beschermingsgraad	IP40
Slagvastheid	$\geq \text{IK03}$
Bevestiging	Kabelmontage
Omgevingstemperatuur min. ($^{\circ}\text{C}$)	-5
Omgevingstemperatuur max. ($^{\circ}\text{C}$)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Dimensions (mm)

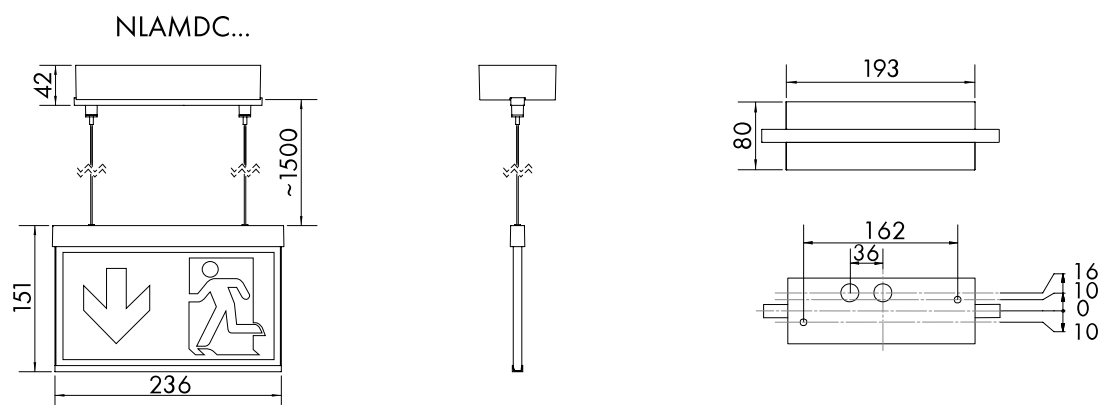

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Self-contained luminaire AM LED 3h 230V AC rope surface stainless steel look, viewing distance: 22m, 1h/3h/8h adjustable, cord suspension: standard length 1500mm (shortenable), LiFePO4 battery	NLAMDCE43S
Optionele toebehoren	
Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTLO
Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTLU
Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTRO
Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTRU
KS, AM, KB Pictogrammen brandbestrijdingsmiddelen Set pictogrammen volgens ISO7010 (brandblusser, brandslang, branddetector, middelen en apparaten voor brandbestrijding)	NLKS4FIRE
Set 2 accus LiFePO4 3,2V 1,2Ah f. WirelessControl lum. w.LEO LiFePO4 - Lithium-iron phosphate battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU321L
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV