

Emergency luminaire AM Duo anthracite, LED, rope surface

Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, Cord suspension: standard length 1500mm (shortenable), with additional LED spot for safety illumination in emergency mode, 140lm




Technische Daten

Netto lengte (mm)	241,00
Breedte (mm)	80,00
Hoogte (mm)	184,00
Nettogewicht (kg)	1,15
Type verlichting	Gecombineerde veiligheid en noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	Met bewaking en centrale bediening
Productgroep	Ring licht
Design	AM
Kleur	RAL 7016
Pictogrammen	Set pictogrammen (pijl links, rechts, onder, boven en folie wit) conform ISO 7010

Technische Daten - Fortsetzung

Detectie afstand (m)	20
Lichtmiddel	LED (2W) ERT-LED (1W)
Lumen	140
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$; 230VDC $\pm 20\%$
Continu vermogen (W)	3,10
Standby vermogen (W)	1,10
Maximaal vermogen (W)	4,20
Beschermingsgraad	IP40
Slagvastheid	$\geq$ IK03
Bevestiging	Kabelmontage
Omgevingstemperatuur min. ($^{\circ}$ C)	-5
Omgevingstemperatuur max. ($^{\circ}$ C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Dimensions (mm)

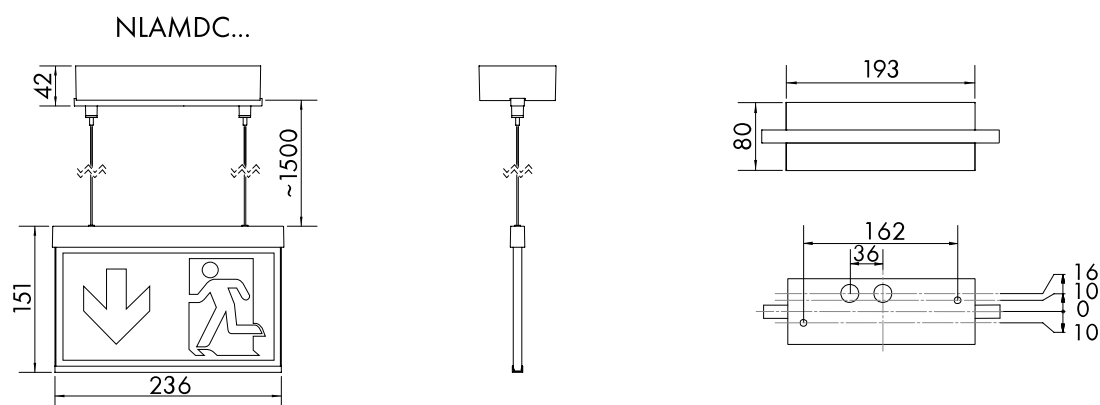

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	3,86	8,79	6,13	3,19	1,41
2,50	2,85	9,62	6,47	3,70	1,56
3,00	3,12	9,84	5,76	4,11	1,61
3,50	3,32	10,35	6,26	4,41	1,48
4,00	3,46	8,75	6,65	4,55	1,22

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emergency luminaire AM Duo anthracite, LED, rope surface	
Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, Cord suspension: standard length 1500mm (shortenable), with additional LED spot for safety illumination in emergency mode, 140lm	NLAMDTA09E
Optionele toebehoren	
Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS	
Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTLO
Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS	
Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTLU
Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS	
Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTRO
Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS	
Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTRU
KS, AM, KB Pictogrammen brandbestrijdingsmiddelen	
Set pictogrammen volgens ISO7010 (brandblusser, brandslang, branddetector, middelen en apparaten voor brandbestrijding)	NLKS4FIRE
KS, AM, KB Pictogrammen eerste hulp	
Set pictogrammen volgens ISO7010 (eerste hulp, verzamelpunt, defibrillator, nooduitgang met ladder)	NLKS4HELP
AM/AX Aanbouwadapter noodverlichting antraciet	
Voor zijdelingse kabelinvoer	NLAMAXAPAA