

Datenblatt für Artikel: NLAMRW403W

Emerg. luminaire AM WirelessControl 3h 230VAC wall recessed

white, LiFeP04 battery, viewing distance: 22m, radio switchable




Technische Daten

Netto lengte (mm)	241,00
Breedte (mm)	79,00
Hoogte (mm)	151,00
Nettogewicht (kg)	1,15
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessControl Professional
Productgroep	Ring licht
Design	AM
Kleur	RAL 9003
Pictogrammen	Set pictogrammen (pijl links, rechts, onder, boven en folie wit) conform ISO 7010
Detectie afstand (m)	22
Autonomietijd (h)	3

Technische Daten - Fortsetzung

Lichtmiddel	LED (2W)
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Continu vermogen (W)	3,50
Standby vermogen (W)	0,80
Maximaal vermogen (W)	4,70
Type batterij (V/Ah)	LiFePO4 2x 3,2V/ 1,2Ah
Beschermingsgraad	IP40
Slagvastheid	$\geq$ IK03
Bevestiging	Wandinbouw
Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Dimensions (mm)

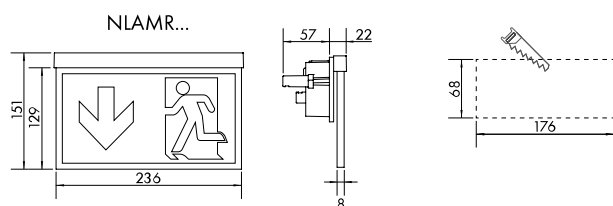

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emerg. luminaire AM WirelessControl 3h 230VAC wall recessed white, LiFePO4 battery, viewing distance: 22m, radio switchable	NLAMRW403W
Optionele toebehoren	
Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTLO
Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS	
Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTLU
Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS	
Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTRO
Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS	
Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTRU
Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS	

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Optionele toebehoren	
KS, AM, KB Pictogrammen brandbestrijdingsmiddelen	NLKS4FIRE
Set pictogrammen volgens ISO7010 (brandblusser, brandslang, branddetector, middelen en apparaten voor brandbestrijding)	NLKS4FIRE
AM/AX Inbouwbehuizing beton	NLAMAXBE
Set 2 accus LiFePO4 3,2V 1,2Ah f. WirelessControl lum. w.LEO	NLAKKU321L
LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU321L
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV