

Emergency luminaire ASM WirelessConnect LED 8h 230V AC

Universal mounting, with LiFePO₄ battery, exit sign luminaire, with Bluetooth communication.



Technische Daten


Netto lengte (mm)	277,00
Hoogte (mm)	184,00
Diepte (mm)	46,00
Nettogewicht (kg)	0,80
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessConnect
Productgroep	Verlichting metaal Ring licht
Design	ASM
Kleur	Zilver
Pictogrammen	Set pictogrammen (pijl links, rechts, onder, boven en folie wit) conform ISO 7010
Detectie afstand (m)	22

Technische Daten - Fortsetzung

Autonomietijd (h)	8
Lichtmiddel	LED (2W)
Nominale spanning (V)	230VAC 50Hz ±20%
Continu vermogen (W)	3,90
Standby vermogen (W)	1,50
Maximaal vermogen (W)	5,30
Type batterij (V/Ah)	LiFePO4 3,2V/ 3,0Ah
Beschermingsgraad	IP40
Slagvastheid	IK03
Bevestiging	Universeel Wandbevestiging Plafondmontage
Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Abmessungen (mm)

NLASMU...

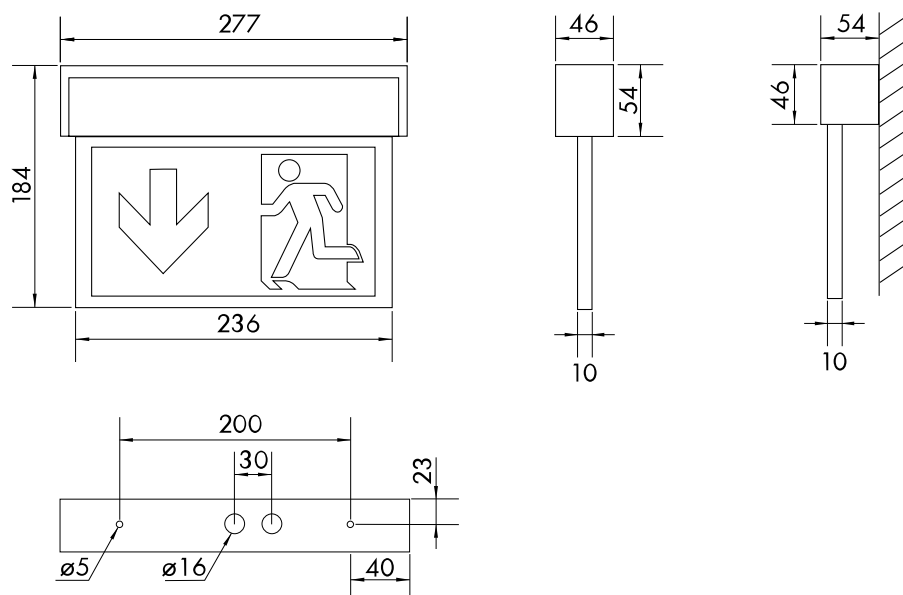

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emergency luminaire ASM WirelessConnect LED 8h 230V AC Universal mounting, with LiFePO4 battery, exit sign luminaire, with Bluetooth communication.	NLASMU408B
Optionele toebehoren	
KM,KMB,KS Inbouwkader noodarmatuur wit Uitsnijding plafond: 275x54mm	NLKME
KM/KS Haakse wandbeugel wit	NLAWKSU
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLILL.23., LiFePO4 - Lithium-iron phosphat battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Pendelophanging noodverlichting 500mm bedrading wit Pendelophanging noodverlichting 500mm bedrading wit	NL2DWKMKS
Korf balbescherming KD/ KM/ KS/ LM LxHxB 320x220x120mm	NLBALL1
Design kabelophanging 2000mm 1 paar 35	NLDSA000
Design koordophanging 2000mm 1 paar	NLCORD2
Design koordophanging 4000mm 1 paar	NLCORD4