

Emerg. luminaire EE 1x1W ERT-LED 230V AC/DC spot illum.


White, with round cover, ceiling recessed mounting with metal springs and external electronic box, security luminaire to illuminate areas with high halls (>4m) with a luminaire distance of 9,5m at a mounting high of 9m, with supervision - centrally switchable



Technische Daten

Hoogte (mm)	23,00
Netto diameter (mm)	88,00
Nettogewicht (kg)	0,30
Type verlichting	Noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	Met bewaking en centrale bediening
Productgroep	Verlichting metaal
Design	EE
Kleur	Wit
Lichtmiddel	ERT-LED (1W)
Lumen	140
Nominale spanning (V)	230VAC 50Hz ±20%; 230VDC ±20%
Beschermingsgraad	IP20
Bevestiging	Plafondinbouw
Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4

Dimensions (mm)

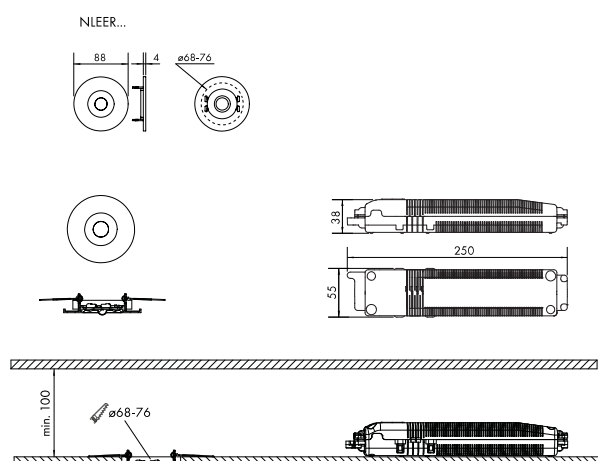

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,00	4,76	4,79	4,84	2,00
2,50	2,25	5,37	5,43	5,48	2,33
3,00	2,43	5,89	5,94	5,99	2,52
3,50	2,64	6,44	6,52	6,59	2,73
4,00	2,80	6,88	6,99	7,09	2,91
5,00	3,00	7,74	7,86	7,96	3,12
6,00	3,20	8,38	8,50	8,64	3,32
7,00	3,12	8,80	8,98	9,14	3,26
8,00	2,92	9,02	9,22	9,42	3,08
9,00	2,40	9,03	9,27	9,48	2,58
10,00	1,96	8,84	9,08	9,32	2,12

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emerg. luminaire EE 1x1W ERT-LED 230V AC/DC spot illum. White, with round cover, ceiling recessed mounting with metal springs and external electronic box, security luminaire to illuminate areas with high halls (>4m) with a luminaire distance of 9,5m at a mounting high of 9m, with supervision - centrally switchable	NLEERS029E
Optionele toebehoren	
EE Sierafdekking noodverlichting vierkant wit	NLEEQWS
EE Sierafdekking noodverlichting vierkant wit	
EE Sierafdekking noodverlichting vierkant antraciet	NLEEQAZ
EE Sierafdekking noodverlichting vierkant antraciet	
EE Sierafdekking noodverlichting rond antraciet	NLEERAZ
EE Sierafdekking noodverlichting rond antraciet	