

Datenblatt für Artikel: NLFLU010EL

Emergency luminaire FLU 10W LED 230V AC/DC EL floodlight

Zinc die-cast, colour anthracite, IP66, -25° up to 38°C, with supervision (The monitoring module is installed in the supplied separate housing NLMU06BOX) - centrally switchable, 1900lm



Technische Daten


Netto lengte (mm)	175,00
Hoogte (mm)	165,00
Diepte (mm)	34,00
Nettogewicht (kg)	2,10
Type verlichting	Noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	Met bewaking en centrale bediening
Productgroep	Verlichting metaal
Design	FLU
Kleur	RAL 7016
Lichtmiddel	LED (10W)
Lumen	1900

Technische Daten - Fortsetzung


Nominale spanning (V)	230VAC 50Hz ±20%; 230VDC ±20%
Continu vermogen (W)	11,50
Standby vermogen (W)	1,50
Maximaal vermogen (W)	11,50
Beschermingsgraad	IP66
Slagvastheid	IK08
Bevestiging	Wandbevestiging
Omgevingstemperatuur min. (°C)	-25
Omgevingstemperatuur max. (°C)	38
AA Klasse E 8101	AA3 AA4 AA5
Leverancier	Schrack

Dimensions (mm)

NLFLU010EL

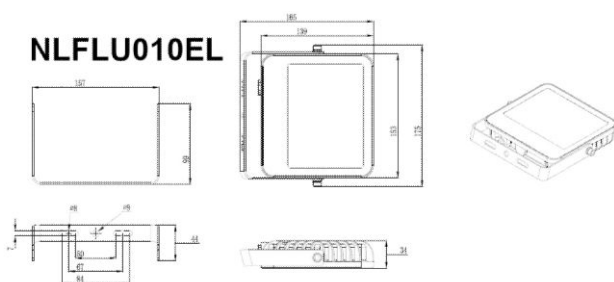

NLMU06BOX

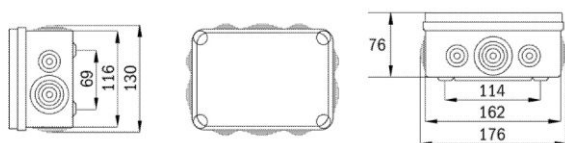

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	2,83	6,25	6,25	6,25	2,83
2,50	3,54	7,81	7,81	7,81	3,54
3,00	4,24	9,38	9,38	9,38	4,24
3,50	4,95	10,94	10,94	10,94	4,95
4,00	5,66	12,5	12,5	12,5	5,66
5,00	6,83	14,95	14,95	14,95	6,83
6,00	7,83	17,01	17,01	17,01	7,83
7,00	8,71	19,21	19,21	19,21	8,71
8,00	9,5	21,25	21,25	21,25	9,5
9,00	10,25	23,12	23,12	23,12	10,25
10,00	10,93	24,83	24,83	24,83	10,93
12,00	12,07	27,95	27,95	27,95	12,07
14,00	12,76	30,74	30,74	30,74	12,76
16,00	13,13	33,13	33,13	33,13	13,13

BEZEICHNUNG

BEST.NR.

Emergency luminaire FLU 10W LED 230V AC/DC EL floodlight

Zinc die-cast, colour anthracite, IP66, -25° up to 38°C, with supervision (The monitoring module is installed in the supplied separate housing NLMU06BOX) - centrally switchable, 1900lm

NLFLU010EL