


Emergency luminaire FM anthracite LED

230V, wall surface

Wall surface mounting, with supervision - centrally switchable, rescue sign luminaire, HACCP certified for food industry; viewing distance: 22m

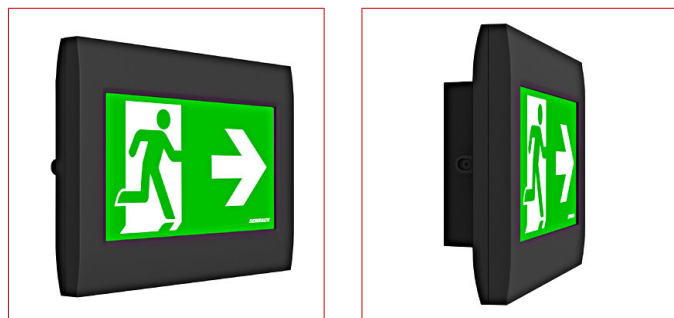


Technische Daten

Netto lengte (mm)	262,00
Hoogte (mm)	188,00
Diepte (mm)	58,00
Nettogewicht (kg)	2,00
Type verlichting	Noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	Met bewaking en centrale bediening
Productgroep	Verlichting metaal
Design	FM
Kleur	RAL 7016
Pictogrammen	Set pictogrammen (pijl links, rechts, onder, boven) conform ISO 7010
Detectie afstand (m)	22
Lichtmiddel	LED (2W)
Nominale spanning (V)	230VAC 50Hz ±20%; 230VDC ±20%
Continu vermogen (W)	3,40
Standby vermogen (W)	1,10
Maximaal vermogen (W)	3,40
Beschermingsgraad	IP65
Slagvastheid	IK01
Bevestiging	Wandbevestiging
Omgevingstemperatuur min. (°C)	-5

Technische Daten - Fortsetzung


Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Dimensions (mm)

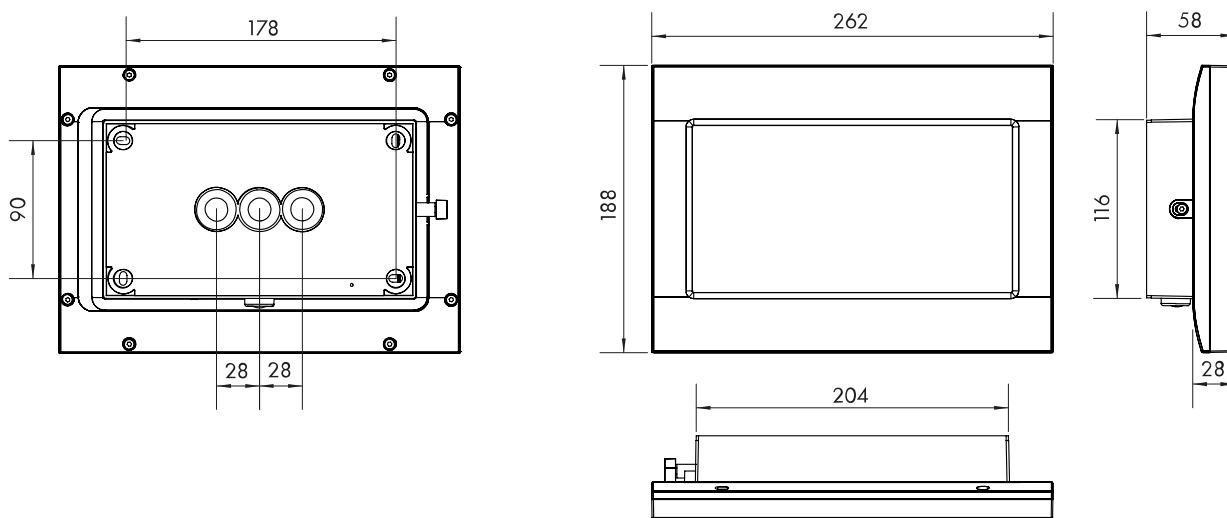


Dimensions accessoires (mm)

NLFMDA

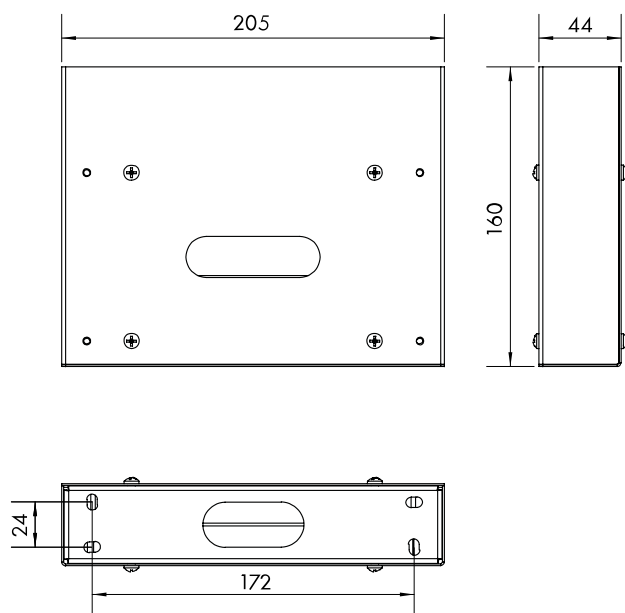

NLFMWA

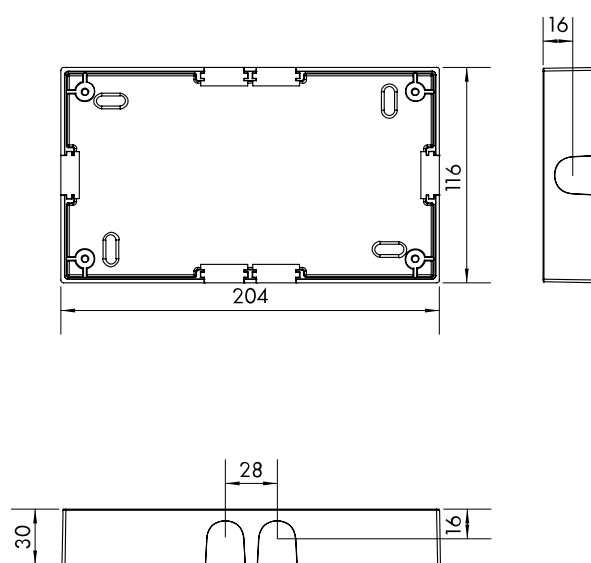

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emergency luminaire FM anthracite LED 230V, wall surface Wall surface mounting, with supervision - centrally switchable, rescue sign luminaire, HACCP certified for food industry; viewing distance: 22m	NLFMWA09EL
Optionele toebehoren	
Surface mounting adapter for luminaires Design FM	NLFMWA001