

Emergency luminaire IL 1x3W ERT-LED 230V hallway surface


White, surface ceiling mounting, Safety luminaire for lightning areas with luminaire distance 27m at a room height of 6m, with supervision - centrally switchable




Technische Daten

Hoogte (mm)	36,00
Netto diameter (mm)	99,00
Nettogewicht (kg)	0,35
Type verlichting	Noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	Met bewaking en centrale bediening
Productgroep	Kunststof verlichting
Design	IL
Halogeenvrij	Behuizing van halogeenvrij kunststof
Kleur	Wit
Lichtmiddel	ERT-LED (3W)
Lumen	360
Nominale spanning (V)	230VAC 50Hz ±20%; 230VDC ±20%
Beschermingsgraad	IP40
Bevestiging	Plafondmontage
Omgevingstemperatuur min. (°C)	-20
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack


Dimensions NLILD... (mm)

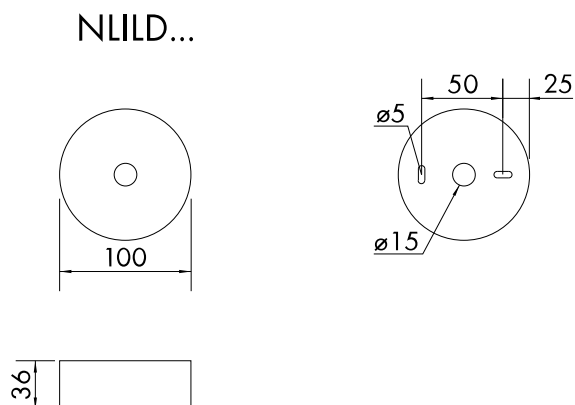

Dimensions accessoires NLILIP65 (mm)

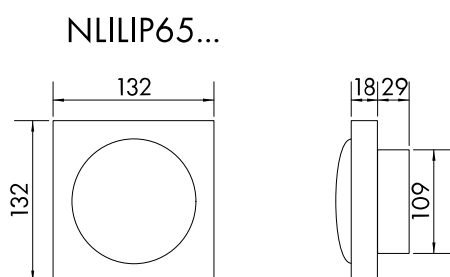

Dimensions accessoires Zinc die-dast housing NLEA.. (mm)

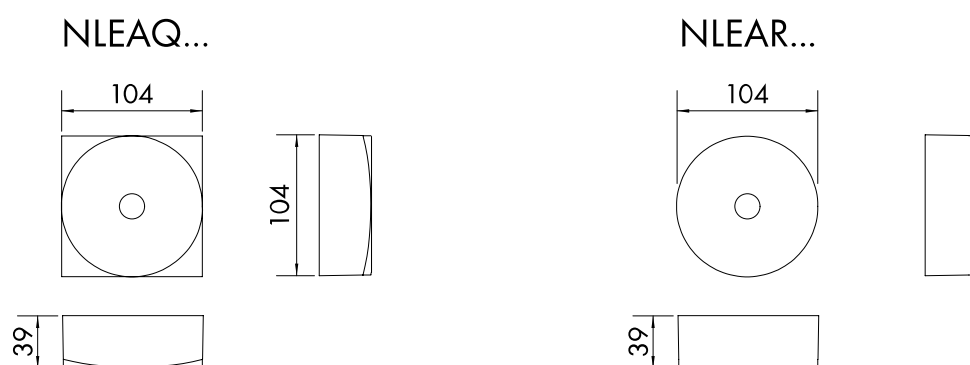

Dimensions recessed frame NLILDE (mm)



Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,30	6,19	12,64	19,15	8,02
2,50	2,41	6,52	14,11	21,89	9,33
3,00	2,43	6,80	15,42	24,37	9,81
3,50	2,45	7,00	16,34	26,62	10,16
4,00	2,31	7,09	16,66	28,11	9,42
6,00	1,28	6,40	13,14	27,10	5,04

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emergency luminaire IL 1x3W ERT-LED 230V hallway surface	
White, surface ceiling mounting, Safety luminaire for lightning areas with luminaire distance 27m at a room height of 6m, with supervision - centrally switchable	NLILDF029E
Optionele toebehoren	
IL Afdekking vierkant B1 wit LxBxP 100x100x40mm	NLILB1
IL Afdekking vierkant B2 met rand wit LxBxP 120x120x40mm	NLILB2
NLILDR/ NLILDF/ NLILDS Opbouwbehuizing rond wit NLILDR/ NLILDF/ NLILDS Opbouwbehuizing rond wit	NLEAR
NLILDR/ NLILDF/ NLILDS Opbouwbehuizing rond antraciet NLILDR/ NLILDF/ NLILDS Opbouwbehuizing rond antraciet	NLEARAZ

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Optionele toebehoren	
NLILDR/ NLILDF/ NLILDS Opbouwbehuizing vierkant wit	NLEAQ
NLILDR/ NLILDF/ NLILDS Opbouwbehuizing vierkant wit	
NLILDR/ NLILDF/ NLILDS Opbouwbehuizing vierkant antraciet	NLEAQAZ
NLILDR/ NLILDF/ NLILDS Opbouwbehuizing vierkant antraciet	
Adaptring voor zijdelingse invoer kabel	NLILDAPA2
Diameter 80x15mm	
Korf balbescherming IL/ KI/ VI/ RI/ KT/ DAQ/ DAR	NLBALL3
LxBxH 200x200x90mm	
Opbouwbehuizing voor NLILD IP65 wit	NLILIP65K
Opbouwbehuizing voor NLILD IP65 wit	
Opbouwbehuizing voor NLILD IP65 IK10 wit	NLILIK10W
Opbouwbehuizing voor NLILD IP65 IK10 wit	