

# Noodarmatuur IL WL 3W ERT-LED 8h 230VAC gang inbouw


White, recessed ceiling mounting, Security luminaire to illuminate rescue path with luminaire distance 11,4m at mounting height 4m, central switching, 110lm



## Technische Daten

|                                |                                      |
|--------------------------------|--------------------------------------|
| Hoogte (mm)                    | 95,00                                |
| Netto diameter (mm)            | 122,00                               |
| Nettogewicht (kg)              | 0,30                                 |
| Type verlichting               | Noodverlichting                      |
| Type batterijvoeding           | Autonome batterij                    |
| Type toestel                   | WirelessControl Professional         |
| Productgroep                   | Kunststof verlichting                |
| Design                         | IL                                   |
| Halogeenvrij                   | Behuizing van halogeenvrij kunststof |
| Kleur                          | Wit                                  |
| Autonomietijd (h)              | 8                                    |
| Lichtmiddel                    | ERT-LED (3W)                         |
| Lumen                          | 110                                  |
| Nominale spanning (V)          | 230VAC 50Hz ±20%                     |
| Type batterij (V/Ah)           | NiMh 4,8V/ 2,0Ah                     |
| Beschermingsgraad              | IP20                                 |
| Bevestiging                    | Plafondinbouw                        |
| Omgevingstemperatuur min. (°C) | -5                                   |
| Omgevingstemperatuur max. (°C) | 30                                   |
| AA Klasse E 8101               | AA4                                  |

## Dimensions NLILE... (mm)

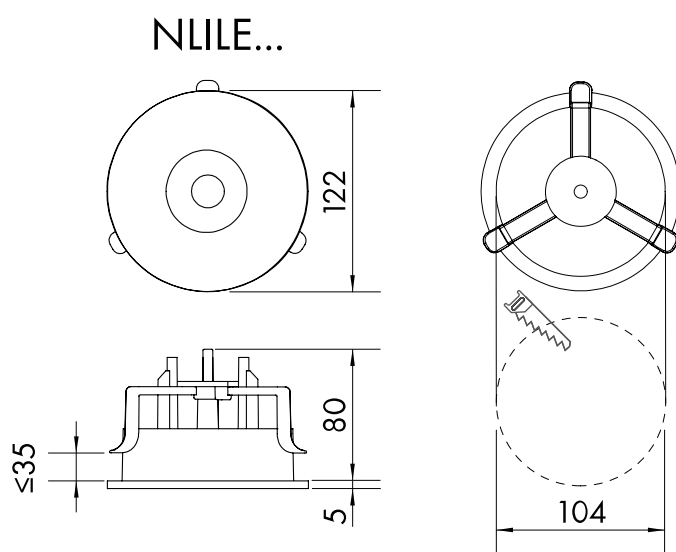

## Artikeltabelle

| BEZEICHNUNG                                                                                                                                    | BEST.NR.   |
|------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Noodarmatuur IL WL 3W ERT-LED 8h 230VAC gang inbouw                                                                                            |            |
| White, recessed ceiling mounting, Security luminaire to illuminate rescue path with luminaire distance 11,4m at mounting height 4m, NLILEF028W |            |
| central switching, 110lm                                                                                                                       |            |
| <b>Optionele toebehoren</b>                                                                                                                    |            |
| Gereedschap om inbouwnoodverlichting NLILE te openen                                                                                           | NLILTOOL   |
| Klokboor snijdiepte 36mm Ø105mm zonder snelspanner                                                                                             | GI63290105 |
| Ball protection plexiglas lxwd=190x190x62mm, for IL/EA                                                                                         |            |
| Thickness 5mm, recommended for NLIL.. surface mounted                                                                                          | NLBALLPLX4 |
| Korf balbescherming IL/ KI/ VI/ RI/ KT/ DAQ/ DAR                                                                                               |            |
| LxBxH 200x200x90mm                                                                                                                             | NLBALL3    |
| Batterij NiMH 4,8V 2,0Ah voor LPU-/LEM-module                                                                                                  |            |
| Vervangbatterij noodverlichting                                                                                                                | NLAKKU4820 |