

Emergency luminaire IL 1x3W ERT-LED 230V spot recessed


White, recessed ceiling mounting, Hi-bay radial beam for space illumination of high halls with luminaire distance 12,6m at a room height of 14m, with supervision - centrally switchable



Technische Daten

Hoogte (mm)	90,00
Netto diameter (mm)	122,00
Nettogewicht (kg)	0,35
Type verlichting	Noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	Met bewaking en centrale bediening
Productgroep	Kunststof verlichting
Design	IL
Halogeenvrij	Behuizing van halogeenvrij kunststof
Afwerking	Wit
Lichtmiddel	ERT-LED (3W)
Lumen	360
Nominale spanning (V)	230VAC 50Hz ±20%; 230VDC ±20%
Beschermingsgraad	IP20
Bevestiging	Plafondinbouw
Omgevingstemperatuur min. (°C)	-20
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Dimensions NLILE... (mm)

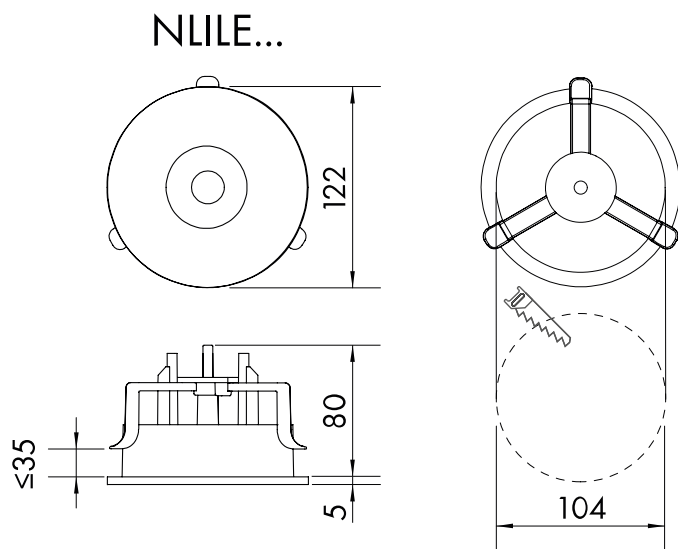

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,22	5,34	5,38	5,41	2,30
2,50	2,78	6,67	6,72	6,76	2,88
3,00	3,11	7,62	7,68	7,74	3,11
3,50	3,26	8,15	8,21	8,27	3,38
4,00	3,48	8,67	8,74	8,82	3,60
5,00	3,90	9,70	9,64	9,60	3,90
6,00	4,20	10,50	10,44	10,36	4,04
7,00	4,38	11,22	11,14	11,04	4,20
8,00	4,44	11,82	11,70	11,56	4,26
9,00	4,38	12,27	12,15	12	4,38
10,00	4,44	12,68	12,52	12,32	4,24
12,00	3,66	12,99	12,78	12,57	3,66
14,00	2,96	12,68	12,44	12,24	2,72
16,00	1,68	11,64	11,44	11,24	1,68

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emergency luminaire IL 1x3W ERT-LED 230V spot recessed White, recessed ceiling mounting, Hi-bay radial beam for space illumination of high hallswith luminaire distance 12,6m at a room height of 14m, with supervision - centrally switchable	NLILES029E
Optionele toebehoren	
Gereedschap om inbouwnoodverlichting NLILE te openen	NLILTOOL
Klokboor snijdiepte 36mm Ø105mm zonder snelspanner	GI63290105
Ball protection plexiglas lxwxh=190x190x62mm, for IL/EA Thickness 5mm, recommended for NLIL.. surface mounted	NLBALLPLX4
Korf balbescherming IL/ KI/ VI/ RI/ KT/ DAQ/ DAR	NLBALL3
XL 150 Installation housing - with short trafo tunnel order matching front additionally	GTDP870
Front part mineral fibre board for XL150 Installationhousing	GTDP874