

Self-cont. luminaire KC Cool Wireless LED 3h 230V AC

Wall mounting, IP65, temp. range -30° up to 35°C, 6 x HP LED 0,5W, batteries and electronics in external IP54 housing (176 x 130 x 76mm) to be mounted outside the cold area, viewing distance: 30m, 150lm



Technische Daten


Netto lengte (mm)	340,00
Breedte (mm)	60,00
Hoogte (mm)	170,00
Nettogewicht (kg)	1,37
Type verlichting	Gecombineerde veiligheid en noodverlichting Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessControl Professional Cool Versie
Type toestel	Kunststof verlichting
Design	KC
Halogeenvrij	Behuizing van halogeenvrij kunststof
Afwerking	Wit
Detectie afstand (m)	30
Autonomietijd (h)	3
Lichtmiddel	LED (3W)
Lumen	150
Nominale spanning (V)	230VAC 50Hz ±20%
Batterij type (V/Ah)	NiMh 12V/ 0,8Ah
Beschermingsgraad	IP54
Bevestiging	Wandaanbouw

Technische Daten - Fortsetzung


Omgevingstemperatuur min. (°C)	-30
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA3 AA4 AA5
Leverancier	Schrack

Dimensions (mm)


NLKCW...

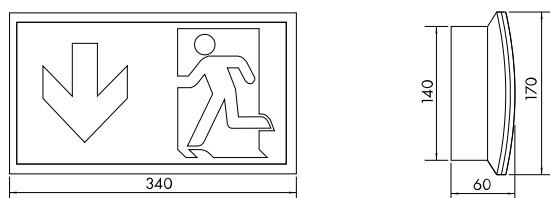

Drilling distances (mm)

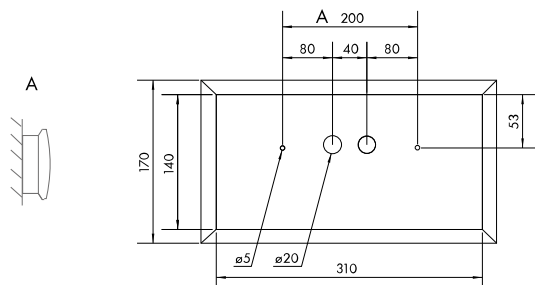

Housing IP54 for COOL-version (mm)

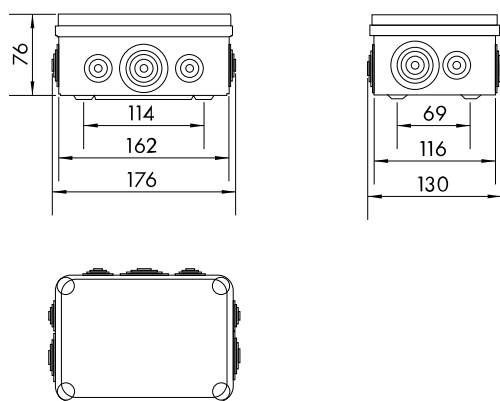

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 3h autonomy time

Montagehöhe [m]					
2,00	2,65	6,77	6,83	6,88	2,75
2,50	2,88	7,34	7,43	7,51	2,88
3,00	2,80	7,81	7,87	7,93	2,90
3,50	2,73	8,14	8,16	8,19	2,83
4,00	2,50	7,99	8,19	8,35	2,70

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Self-cont. luminaire KC Cool Wireless LED 3h 230V AC	
Wall mounting, IP65, temp. range -30° up to 35°C, 6 x HP LED 0,5W, batteries and electronics in external IP54 housing (176 x 130 x 76mm) to be mounted outside the cold area, viewing distance: 30m, 150lm	NLKCWPC03W
Optionele toebehoren	
Korf balbescherming KC/ KB/ KBG/ KX/ PF/ LX/ RX	NLBALL2
Batterij NiMH 12V 0,8Ah Buscontrol, Wirelesscontrol	NLAKKU1208
Vervangbatterij noodverlichting	
KC Pictogram links boven	NLKCPIKTLO
KC Pictogram links onder	NLKCPIKTLU
KC Pictogram rechts boven	NLKCPIKTRO
KC Pictogram rechts onder	NLKCPIKTRU