

KMB Noodverlichting LED 3h autonoom autotest IP54 wit

Universele montage, met 4x0,5W High Power LED, met LiFePO4 batterij, 1u/3u/8u instelbaar



Technische Daten



Netto lengte (mm)	250,00
Breedte (mm)	34,00
Hoogte (mm)	50,00
Nettogewicht (kg)	0,29
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	Noodverlichting met autotest
Productgroep	Kunststof verlichting
Design	KMB
Halogeenvrij	Behuizing van halogeenvrij kunststof
Kleur	RAL 9003
Autonomietijd (h)	3
Lichtmiddel	LED (2W)

Technische Daten - Fortsetzung




Lumen	1h: 190;3h: 190;8h: 85
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Continu vermogen (W)	3,30
Standby vermogen (W)	1
Maximaal vermogen (W)	4,60
Type batterij (V/Ah)	LiFePO4 3,2V/ 3,0Ah
Beschermingsgraad	IP54
Slagvastheid	$\geq$ IK03
Bevestiging	Universeel Wandbevestiging Plafondmontage Plafondinbouw mogelijk
Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Abmessungen (mm)

NLKMB...

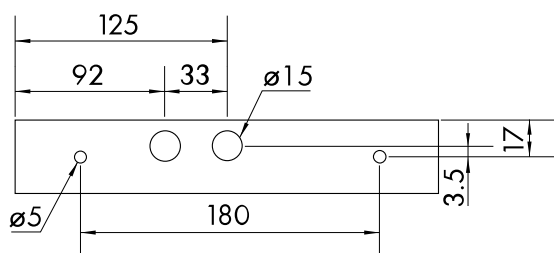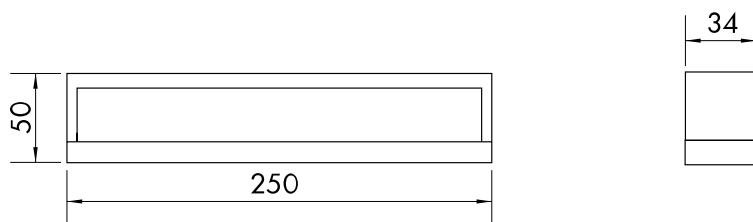

NLKME

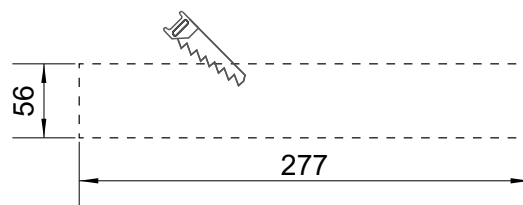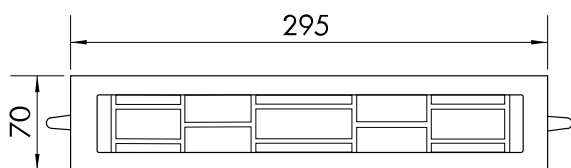

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	1,66	4,42	7,55	10,74	4,54
2,50	1,64	4,76	8,42	12,16	5,10
3,00	1,67	4,74	9,08	13,39	5,57
3,50	1,63	4,65	9,52	14,49	5,97
4,00	1,59	4,72	10,03	15,48	3,78
5,00	1,19	4,62	7,33	14,22	2,89

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 8h Autonomiezeit

					
2,00	1,11	3,14	5,98	8,83	3,65
2,50	1,08	3,14	6,47	9,90	3,95
3,00	0,98	3,16	5,15	9,46	2,11
3,50	0,66	3,08	4,70	9,30	1,44

Artikeltabelle

BEZEICHNUNG	BEST.NR.
KMB Noodverlichting LED 3h autonoom autotest IP54 wit	NLKMB403SC
Universele montage, met 4x0,5W High Power LED, met LiFePO4 batterij, 1u/3u/8u instelbaar	
Optionele toebehoren	
KM,KMB,KS Inbouwkader noodarmatuur wit	NLKME
Uitsnijding plafond: 275x54mm	
KM/KS Haakse wandbeugel wit	NLAWKSU
Accu LiFePO4 3,2V 3,3Ah for LED luminaire	
For design KM, KSC, KMB, ASM, ZAW, NLILL.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Pendelophanging noodverlichting 500mm bedrading wit	NL2DWKMKS
Pendelophanging noodverlichting 500mm bedrading wit	
Design kabelophanging 2000mm 1 paar	NLDSA000
35	
Design koordophanging 2000mm 1 paar	NLCORD2
Design koordophanging 4000mm 1 paar	NLCORD4