

Emergency luminaire KM BWirelessConnect LED 8h 230V AC, white

White, universal mounting, with LiFePO₄ battery, emergency luminaire, with Bluetooth communication., 85lm



Technische Daten



Netto lengte (mm)	250,00
Breedte (mm)	34,00
Hoogte (mm)	50,00
Nettogewicht (kg)	0,29
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessConnect
Productgroep	Kunststof verlichting
Design	KMB
Halogeenvrij	Behuizing van halogeenvrij kunststof
Kleur	RAL 9003
Autonomietijd (h)	8
Lichtmiddel	LED (2W)

Technische Daten - Fortsetzung


Lumen	85
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Continu vermogen (W)	3,90
Standby vermogen (W)	1,50
Maximaal vermogen (W)	5,30
Type batterij (V/Ah)	LiFePO4 3,2V/ 3,3Ah
Beschermingsgraad	IP54
Slagvastheid	$\geq$ IK03
Bevestiging	Universeel Wandbevestiging Plafondmontage Plafondinbouw mogelijk
Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Abmessungen (mm)

NLKMB...

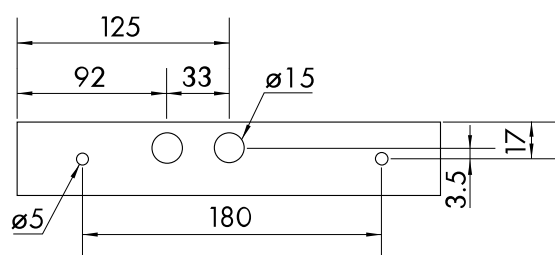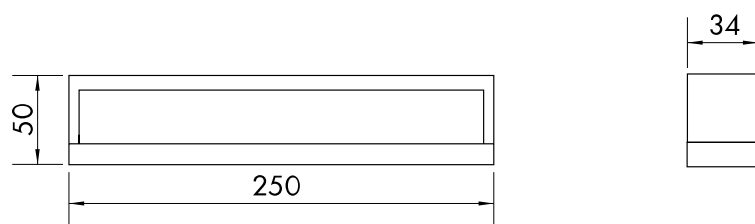

NLKME

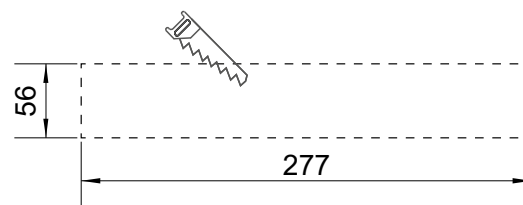

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 8h Autonomiezeit

					
2,00	1,11	3,14	5,98	8,83	3,65
2,50	1,08	3,14	6,47	9,90	3,95
3,00	0,98	3,16	5,15	9,46	2,11
3,50	0,66	3,08	4,70	9,30	1,44

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emergency luminaire KM BWirelessConnect LED 8h 230V AC,white White, universal mounting, with LiFePO4 battery, emergency luminaire, with Bluetooth communication., 85lm	NLKMB408WB
Optionele toebehoren	
KM,KMB,KS Inbouwkader noodarmatuur wit Uitsnijding plafond: 275x54mm	NLKME
KM/KS Haakse wandbeugel wit	NLAWKSU
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLILL.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Pendelophanging noodverlichting 500mm bedrading wit Pendelophanging noodverlichting 500mm bedrading wit	NL2DWKMKS
Korf balbescherming KD/ KM/ KS/ LM LxHxB 320x220x120mm	NLBALL1
Design kabelophanging 2000mm 1 paar 35	NLDSA000
Design koordophanging 2000mm 1 paar	NLCORD2
Design koordophanging 4000mm 1 paar	NLCORD4