

## KSC Noodverlichting LED 3h Wireless IP54 wit

White, Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, with transparent cover for additional light of the rescue path, viewing distance: 22m, 190lm, WirelessControl Professional type



## Technische Daten



|                       |                                                                                   |
|-----------------------|-----------------------------------------------------------------------------------|
| Netto lengte (mm)     | 250,00                                                                            |
| Breedte (mm)          | 34,00                                                                             |
| Hoogte (mm)           | 174,00                                                                            |
| Nettogewicht (kg)     | 0,60                                                                              |
| Type verlichting      | Gecombineerde veiligheid en noodverlichting<br>Noodverlichting                    |
| Type batterijvoeding  | Autonome batterij                                                                 |
| Type toestel          | WirelessControl Professional                                                      |
| Productgroep          | Ring licht<br>Kunststof verlichting                                               |
| Design                | KS                                                                                |
| Halogeenvrij          | Behuizing van halogeenvrij kunststof                                              |
| Kleur                 | RAL 9003                                                                          |
| Pictogrammen          | Set pictogrammen (pijl links, rechts, onder, boven en folie wit) conform ISO 7010 |
| Detectie afstand (m)  | 22                                                                                |
| Autonomietijd (h)     | 3                                                                                 |
| Lichtmiddel           | LED (2W)                                                                          |
| Lumen                 | 190                                                                               |
| Nominale spanning (V) | 230VAC 50Hz ±20%                                                                  |
| Continu vermogen (W)  | 3,90                                                                              |
| Standby vermogen (W)  | 1,50                                                                              |

## Technische Daten - Fortsetzung




|                                |                                                                           |
|--------------------------------|---------------------------------------------------------------------------|
| Maximaal vermogen (W)          | 5,30                                                                      |
| Type batterij (V/Ah)           | LiFePO4 3,2V/ 3,0Ah                                                       |
| Beschermingsgraad              | IP54                                                                      |
| Slagvastheid                   | ≥ IK03                                                                    |
| Bevestiging                    | Universeel<br>Wandbevestiging<br>Plafondmontage<br>Plafondinbouw mogelijk |
| Omgevingstemperatuur min. (°C) | -5                                                                        |
| Omgevingstemperatuur max. (°C) | 40                                                                        |
| AA Klasse E 8101               | AA4                                                                       |
| Leverancier                    | Schrack                                                                   |

## Dimensions (mm)



NLKS...

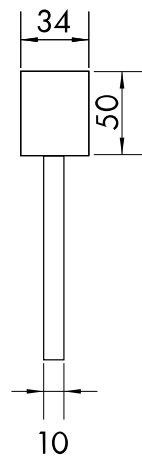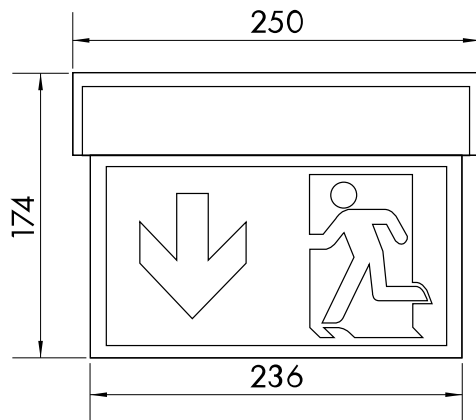

NLKME

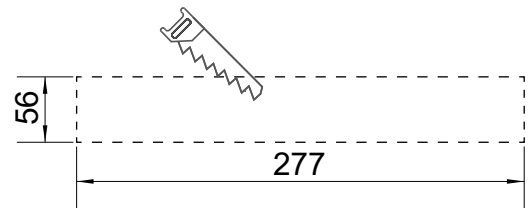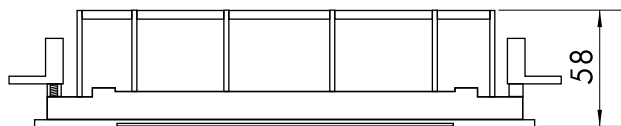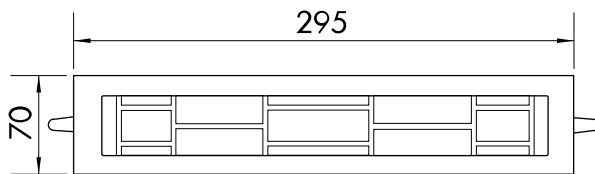

## Drilling distances (mm)

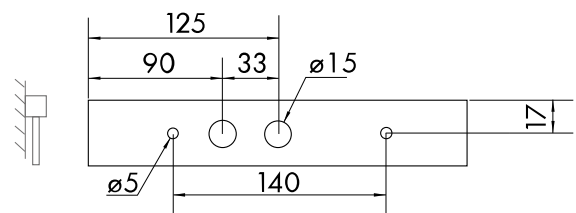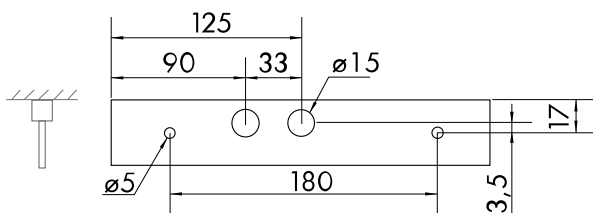

## Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

|  |  |  |  |  |  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 2,00                                                                              | 3,01                                                                              | 7,45                                                                              | 7,31                                                                              | 6,8                                                                                 | 2,73                                                                                |
| 2,50                                                                              | 1,71                                                                              | 8,22                                                                              | 7,95                                                                              | 7,38                                                                                | 3,09                                                                                |
| 3,00                                                                              | 1,24                                                                              | 7,01                                                                              | 6,74                                                                              | 8,07                                                                                | 3,15                                                                                |
| 3,50                                                                              | 1,21                                                                              | 6,33                                                                              | 6,34                                                                              | 8,72                                                                                | 2,89                                                                                |
| 4,00                                                                              | 1,24                                                                              | 3,56                                                                              | 6,18                                                                              | 8,9                                                                                 | 2,82                                                                                |
| 5,00                                                                              | 1,08                                                                              | 3,45                                                                              | 5,58                                                                              | 8,17                                                                                | 2,02                                                                                |

## Artikeltabelle

| BEZEICHNUNG                                                                                                                                                                                                                                                  | BEST.NR.   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| KSC Noodverlichting LED 3h Wireless IP54 wit<br>White, Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, with transparent cover for additional light of the rescue path, viewing distance: 22m, 190lm, WirelessControl Professional type | NLKSC003WL |
| <b>Optionele toebehoren</b>                                                                                                                                                                                                                                  |            |
| Batterij LiFePO4 3,2V 3,3Ah voor KM, KSC, KMB, ASM, ZAW<br>Vervangbatterij noodverlichting                                                                                                                                                                   | NLAKKU3230 |
| Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS<br>Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS                                                                                                                                     | NLAMPIKTLO |
| Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS<br>Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS                                                                                                                                     | NLAMPIKTLU |
| Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS<br>Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS                                                                                                                                   | NLAMPIKTRO |
| Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS<br>Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS                                                                                                                                   | NLAMPIKTRU |
| KS, AM, KB Pictogrammen brandbestrijdingsmiddelen<br>Set pictogrammen volgens ISO7010 (brandblusser, brandslang, branddetector, middelen en apparaten voor brandbestrijding)                                                                                 | NLKS4FIRE  |
| KS, AM, KB Pictogrammen eerste hulp<br>Set pictogrammen volgens ISO7010 (eerste hulp, verzamelpunt, defibrillator, nooduitgang met ladder)                                                                                                                   | NLKS4HELP  |
| KM/KS Haakse wandbeugel wit                                                                                                                                                                                                                                  | NLAWKSU    |
| Pendelophanging noodverlichting 500mm bedrading wit<br>Pendelophanging noodverlichting 500mm bedrading wit                                                                                                                                                   | NL2DWKMKS  |
| Korf balbescherming KD/ KM/ KS/ LM<br>LxHxB 320x220x120mm                                                                                                                                                                                                    | NLBALL1    |
| Design kabelophanging 2000mm 1 paar<br>35                                                                                                                                                                                                                    | NLDSA000   |
| Design koordophanging 2000mm 1 paar                                                                                                                                                                                                                          | NLCORD2    |
| Design koordophanging 4000mm 1 paar                                                                                                                                                                                                                          | NLCORD4    |