

Emergency luminaire KS WirelessConnect LED

8h 230V AC, white

Universal mounting, with LiFePO₄ battery, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, with Bluetooth communication, 85lm



Technische Daten



Netto lengte (mm)	250,00
Breedte (mm)	34,00
Hoogte (mm)	174,00
Nettogewicht (kg)	0,60
Type verlichting	Gecombineerde veiligheid en noodverlichting Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessConnect
Productgroep	Kunststof verlichting
Design	KS
Halogeenvrij	Behuizing van halogeenvrij kunststof
Kleur	RAL 9003

Technische Daten - Fortsetzung




Pictogrammen	Set pictogrammen (pijl links, rechts, onder, boven en folie wit) conform ISO 7010
Detectie afstand (m)	22
Autonomietijd (h)	8
Lichtmiddel	LED (2W)
Lumen	85
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Continu vermogen (W)	3,30
Standby vermogen (W)	1
Maximaal vermogen (W)	4,60
Type batterij (V/Ah)	LiFePO4 3,2V/ 3,0Ah
Beschermingsgraad	IP54
Slagvastheid	$\geq$ IK03
Bevestiging	Universeel Wandbevestiging Plafondmontage Plafondinbouw mogelijk
Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Abmessungen (mm)



NLKS...

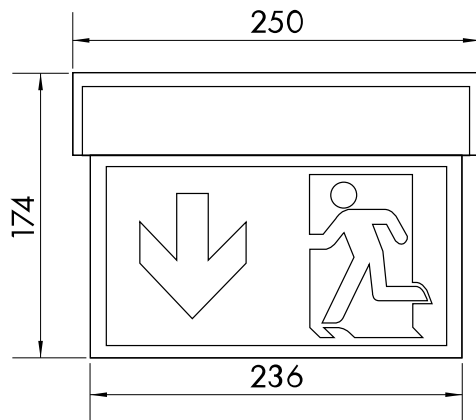

NLKME

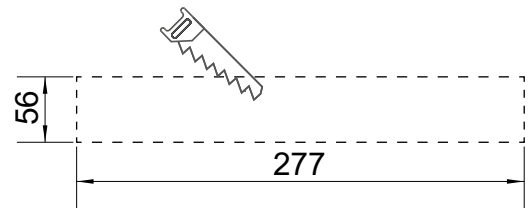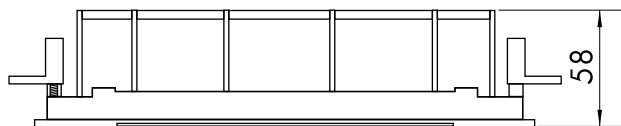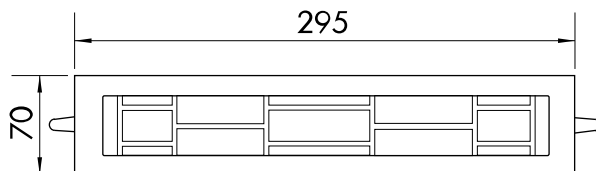

Bohrabstände (mm)

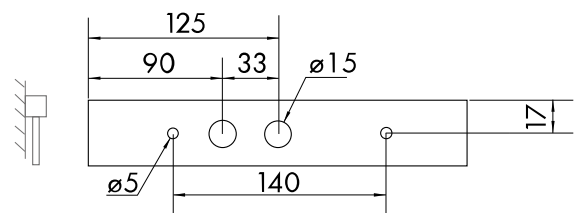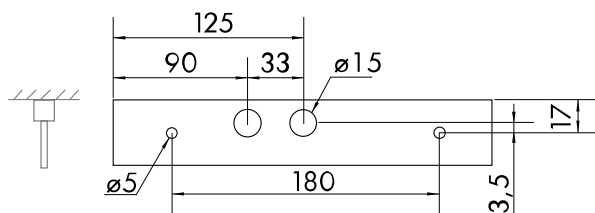

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 8h Autonomiezeit

					
2,00	0,77	4,32	4,12	5,19	1,97
2,50	0,78	2,26	3,92	5,63	1,79
3,00	0,73	2,15	3,59	5,32	1,37
3,50	0,57	2,21	3,16	5,06	0,51

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emergency luminaire KS WirelessConnect LED 8h 230V AC, white Universal mounting, with LiFePO4 battery, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, with Bluetooth communication, 85lm	NLKSC408WB
Optionele toebehoren	
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLILL.23., LiFePO4 - Lithium-iron phosphat battery, UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTLO
Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTLU
Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTRO
Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTRU
KS, AM, KB Pictogrammen brandbestrijdingsmiddelen Set pictogrammen volgens ISO7010 (brandblusser, brandslang, branddetector, middelen en apparaten voor brandbestrijding)	NLKS4FIRE
KS, AM, KB Pictogrammen eerste hulp Set pictogrammen volgens ISO7010 (eerste hulp, verzamelpunt, defibrillator, nooduitgang met ladder)	NLKS4HELP
KM/KS Haakse wandbeugel wit	NLAWKSU
Pendelophanging noodverlichting 500mm bedrading wit Pendelophanging noodverlichting 500mm bedrading wit	NL2DWKMKS
Korf balbescherming KD/ KM/ KS/ LM LxHxB 320x220x120mm	NLBALL1
Design kabelophanging 2000mm 1 paar 35	NLDSA000
Design koordophanging 2000mm 1 paar	NLCORD2
Design koordophanging 4000mm 1 paar	NLCORD4