

Emergency luminaire KS WirelessConnect LED

3h 230V AC, black

Universal mounting, with LiFePO4 battery, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, with Bluetooth communication, 190lm



Technische Daten



Netto lengte (mm)	250,00
Breedte (mm)	34,00
Hoogte (mm)	174,00
Nettogewicht (kg)	0,60
Type verlichting	Gecombineerde veiligheid en noodverlichting Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessConnect
Productgroep	Ring licht Kunststof verlichting
Design	KS
Halogeenvrij	Behuizing van halogeenvrij kunststof

Technische Daten - Fortsetzung




Kleur	RAL 9005
Pictogrammen	Set pictogrammen (pijl links, rechts, onder, boven en folie wit) conform ISO 7010
Detectie afstand (m)	22
Autonomietijd (h)	3
Lichtmiddel	LED (2W)
Lumen	190
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Continu vermogen (W)	3,30
Standby vermogen (W)	1
Maximaal vermogen (W)	4,60
Type batterij (V/Ah)	LiFePO4 3,2V/ 3,0Ah
Beschermingsgraad	IP54
Slagvastheid	$\geq$ IK03
Bevestiging	Universeel Wandbevestiging Plafondmontage Plafondinbouw mogelijk
Omgevingstemperatuur min. ($^{\circ}$ C)	-5
Omgevingstemperatuur max. ($^{\circ}$ C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Abmessungen (mm)



NLKS...

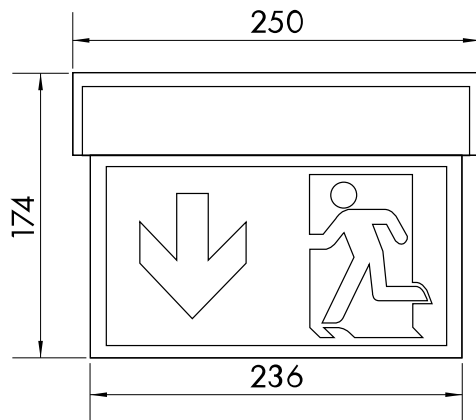

NLKME

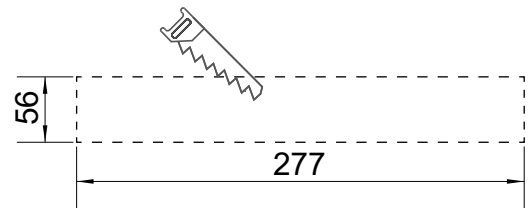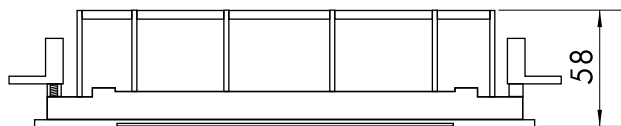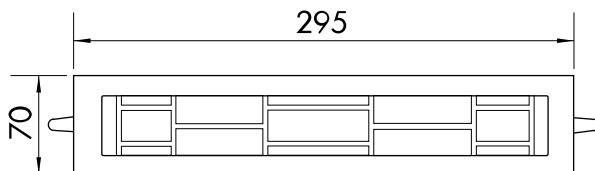

Bohrabstände (mm)

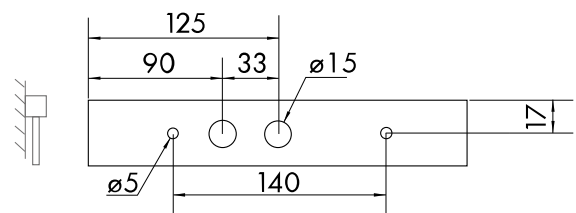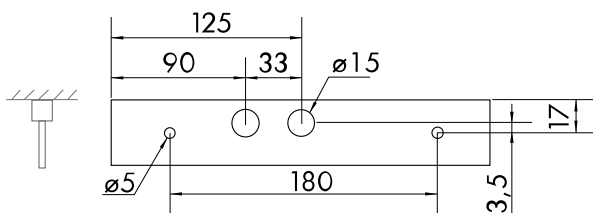

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	3,01	7,45	7,31	6,8	2,73
2,50	1,71	8,22	7,95	7,38	3,09
3,00	1,24	7,01	6,74	8,07	3,15
3,50	1,21	6,33	6,34	8,72	2,89
4,00	1,24	3,56	6,18	8,9	2,82
5,00	1,08	3,45	5,58	8,17	2,02

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emergency luminaire KS WirelessConnect LED 3h 230V AC, black Universal mounting, with LiFePO4 battery, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, with Bluetooth communication, 190lm	NLKSCS403B
Optionele toebehoren	
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phosphat battery, UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTLO
Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTLU
Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTRO
Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTRU
KS, AM, KB Pictogrammen brandbestrijdingsmiddelen Set pictogrammen volgens ISO7010 (brandblusser, brandslang, branddetector, middelen en apparaten voor brandbestrijding)	NLKS4FIRE
KS, AM, KB Pictogrammen eerste hulp Set pictogrammen volgens ISO7010 (eerste hulp, verzamelpunt, defibrillator, nooduitgang met ladder)	NLKS4HELP
Design kabelophanging 2000mm 1 paar 35	NLDSA000
Design koordophanging 2000mm 1 paar	NLCORD2
Design koordophanging 4000mm 1 paar	NLCORD4