


Emergency luminaire KW 4x1W ERT-LED

230V, ceiling mounting

with supervision - centrally switchable, suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m

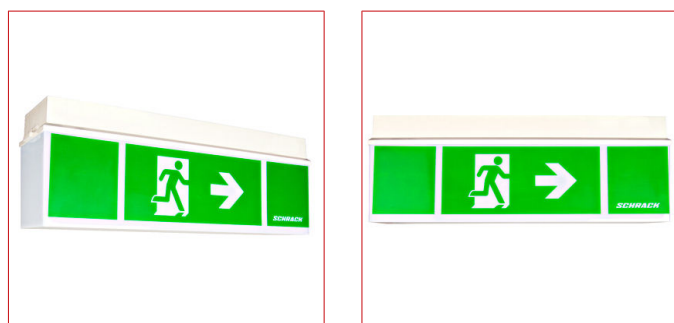


Technische Daten

Netto lengte (mm)	360,00
Breedte (mm)	92,00
Hoogte (mm)	125,00
Nettogewicht (kg)	0,70
Type verlichting	Gecombineerde veiligheid en noodverlichting Noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	Met bewaking en centrale bediening
Type toestel	Kunststof verlichting
Design	KW
Halogeenvrij	Behuizing van halogeenvrij kunststof
Afwerking	Wit
Detectie afstand (m)	16
Lichtmiddel	ERT-LED (4W)
Lumen	520
Nominale spanning (V)	230VAC 50Hz ±20%; 230VDC ±20%
Beschermingsgraad	IP54
Bevestiging	Wandaanbouw Universeel Plafondmontage

Technische Daten - Fortsetzung

Omgevingstemperatuur min. (°C)	-20
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Dimensions (mm)

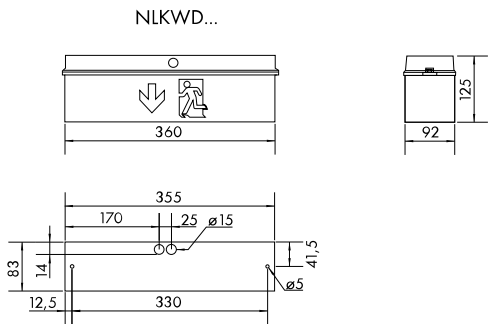

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	3,46	9,46	7,98	6,13	2,30
2,50	3,57	9,93	8,36	6,47	2,33
3,00	3,58	10,22	8,57	6,65	2,26
3,50	3,38	10,35	8,62	6,67	2,02
4,00	3,13	10,32	8,51	6,53	1,62

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emergency luminaire KW 4x1W ERT-LED 230V, ceiling mounting with supervision - centrally switchable, suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m	NLKWD039EL
Optionele toebehoren	
KW Afdekking transparant voor noodverlichting	NLKCW
KW Korf balbescherming	NLBKW
KWI Pictogrammen (pijlen boven, onder, links, rechts) Set pictogrammen volgens ISO7010	NLKWIPKTO
KW Afdekking hoog opaal voor noodverlichting	NLKWH
Pendelpaar 500mm bedraad wit	NL2PW
Wandbeugel voor KB/ KX/ KW/ KCD/ KE/ GX/ RX wit	NLWX001