

# Emergency luminaire KW Autotest LED 3h 230V AC ceiling

1h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side, viewing distance: 16m, IP54, protection class II, with LiFePO4 battery, 1h: 300lm; 3h: 300lm; 8h: 120lm




## Technische Daten

|                      |                                      |
|----------------------|--------------------------------------|
| Netto lengte (mm)    | 390,00                               |
| Breedte (mm)         | 93,00                                |
| Hoogte (mm)          | 139,00                               |
| Nettogewicht (kg)    | 0,80                                 |
| Type verlichting     | Noodverlichting                      |
| Type batterijvoeding | Autonome batterij                    |
| Type toestel         | Noodverlichtng met autotest          |
| Type toestel         | Kunststof verlichting                |
| Design               | KW                                   |
| Halogeenvrij         | Behuizing van halogeenvrij kunststof |
| Afwerking            | Wit                                  |
| Detectie afstand (m) | 16                                   |

## Technische Daten - Fortsetzung

|                                |                         |
|--------------------------------|-------------------------|
| Autonomietijd (h)              | 3                       |
| Lichtmiddel                    | LED (3W)                |
| Lumen                          | 1h: 300;3h: 300;8h: 120 |
| Nominale spanning (V)          | 230VAC 50Hz $\pm 20\%$  |
| Batterij type (V/Ah)           | LiFePO4 2x 3,2V/ 1,6Ah  |
| Beschermingsgraad              | IP54                    |
| Bevestiging                    | Plafondmontage          |
| Omgevingstemperatuur min. (°C) | -5                      |
| Omgevingstemperatuur max. (°C) | 40                      |
| AA Klasse E 8101               | AA4                     |
| Leverancier                    | Schrack                 |

## Maattekening: Emergency luminaire KW Autotest LED 3h 230V AC ceiling

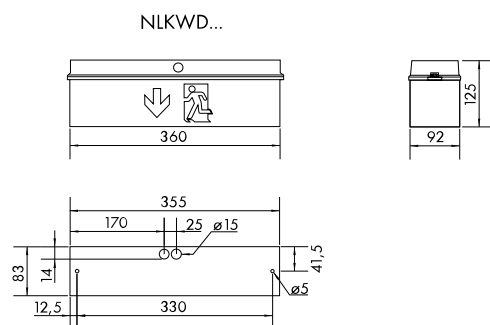

## Abstandstabelle 1h, 3h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

| Montagehöhe [m] |  |  |  |  |  |
|-----------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 2,00            | 3,55                                                                                | 9,23                                                                                | 8,09                                                                                | 7,02                                                                                  | 2,74                                                                                  |
| 2,50            | 3,68                                                                                | 9,78                                                                                | 8,62                                                                                | 7,52                                                                                  | 2,84                                                                                  |
| 3,00            | 3,72                                                                                | 10,17                                                                               | 8,98                                                                                | 7,85                                                                                  | 2,86                                                                                  |
| 3,50            | 3,66                                                                                | 10,40                                                                               | 9,20                                                                                | 8,05                                                                                  | 2,79                                                                                  |
| 4,00            | 3,51                                                                                | 10,51                                                                               | 9,29                                                                                | 8,11                                                                                  | 2,61                                                                                  |
| 5,00            | 2,80                                                                                | 10,34                                                                               | 9,08                                                                                | 7,86                                                                                  | 1,84                                                                                  |

## Artikeltabelle

| BEZEICHNUNG                                                                                                                                                                                                                                                                                                          | BEST.NR.   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Emergency luminaire KW Autotest LED 3h 230V AC ceiling<br>1h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one NLKWD403SC side, viewing distance: 16m, IP54, protection class II, with LiFePO4 battery, 1h: 300lm; 3h: 300lm; 8h: 120lm |            |
| <b>Optionele toebehoren</b>                                                                                                                                                                                                                                                                                          |            |
| KW Korf balbescherming                                                                                                                                                                                                                                                                                               | NLBKW      |
| Pendelpaar 500mm bedraad wit                                                                                                                                                                                                                                                                                         | NL2PW      |
| Wandbeugel voor KB/ KX/ KW/ KCD/ KE/ GX/ RX wit                                                                                                                                                                                                                                                                      | NLAWX001   |
| Set 2 accus LiFePO4 3,2V 3,3Ah f. luminaires. w. LEO or LPK                                                                                                                                                                                                                                                          | NLAKKU323L |
| LiFePO4 - Lithium-iron phosphat battery , UN3480 - UN 3480 : Lithium-Ion batteries                                                                                                                                                                                                                                   |            |