

Datenblatt für Artikel: NLKWD433SC

Emerg.lum. KW Autotest 4x1 W ERT-LED 3h 230V AC ceiling m.

With exchangeable lenses, corridor lenses in scope of delivery included, 1 h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m, IP54, protection class II, with LiFePO4 battery, 1h: 520lm; 3h: 520lm; 8h: 200lm




Technische Daten

Netto lengte (mm)	390,00
Breedte (mm)	93,00
Hoogte (mm)	139,00
Nettogewicht (kg)	0,80
Type verlichting	Gecombineerde veiligheid en noodverlichting Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	Noodverlichtng met autotest
Type toestel	Kunststof verlichting
Design	KW
Halogeenvrij	Behuizing van halogeenvrij kunststof

Technische Daten - Fortsetzung

Afwerking	Wit
Detectie afstand (m)	16
Autonomietijd (h)	3
Lichtmiddel	ERT-LED (4W)
Lumen	1h: 520;3h: 520;8h: 200
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Batterij type (V/Ah)	LiFePO4 2x 3,2V/ 3,3Ah
Beschermingsgraad	IP54
Bevestiging	Plafondmontage
Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Maattekening: Emerg.lum. KW Autotest 4x1W ERT-LED 3h 230V AC ceiling m.

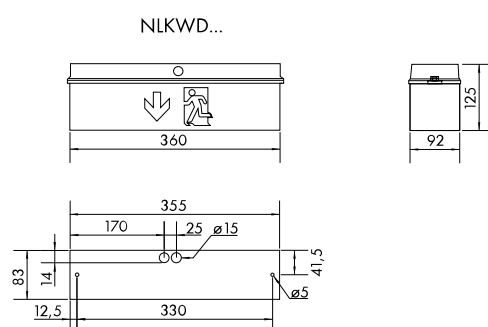

Abstandstabelle 1h, 3h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	3,82	9,88	8,56	7,32	2,88
2,50	3,98	10,50	9,14	7,87	3,01
3,00	4,06	10,95	9,57	8,26	3,06
3,50	4,04	11,26	9,85	8,51	3,02
4,00	3,94	11,44	10,01	8,64	2,90
5,00	3,42	11,42	9,96	8,54	2,34
6,00	1,86	10,92	9,40	7,96	0,56

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emerg.lum. KW Autotest 4x1W ERT-LED 3h 230V AC ceiling m. With exchangeable lenses, corridor lenses in scope of delivery included, 1h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m, IP54, protection class II, with LiFePO4 battery, 1h: 520lm; 3h: 520lm; 8h: 200lm	NLKWD433SC
Optionele toebehoren	
KW Korf balbescherming	NLBKW
Pendelpaar 500mm bedraad wit	NL2PW
Wandbeugel voor KB/ KX/ KW/ KCD/ KE/ GX/ RX wit	NLAWX001
Set 2 accus LiFePO4 3,2V 3,3Ah f. luminaires. w. LEO or LPK	NLAKKU323L
LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries	