


Emergency luminaire KWI Wireless 4x1W ERT-LED 8h 230V wall

With exchangeable lenses, corridor lenses in scope of delivery included, LiFePO₄, wall surface mounting with pictogram on one side, viewing distance: 16m, IP65, IK06, protection class II, radio switchable, 245lm, WirelessControl Professional type




Technische Daten

Netto lengte (mm)	390,00
Breedte (mm)	93,00
Hoogte (mm)	99,00
Nettogewicht (kg)	1,30
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessControl Professional
Productgroep	Kunststof verlichting
Design	KWI
Halogeenvrij	Behuizing van halogeenvrij kunststof
Kleur	Wit
Pictogrammen	Set pictogrammen (pijl links, rechts, onder, boven) conform ISO 7010

Technische Daten - Fortsetzung

Detectie afstand (m)	16
Autonomietijd (h)	8
Lichtmiddel	ERT-LED (4W)
Lumen	245
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Type batterij (V/Ah)	LiFePO4 2x 3,2V/ 3,3Ah
Beschermingsgraad	IP65
Slagvastheid	IK06
Bevestiging	Wandbevestiging Plafondmontage
Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Dimensions (mm)

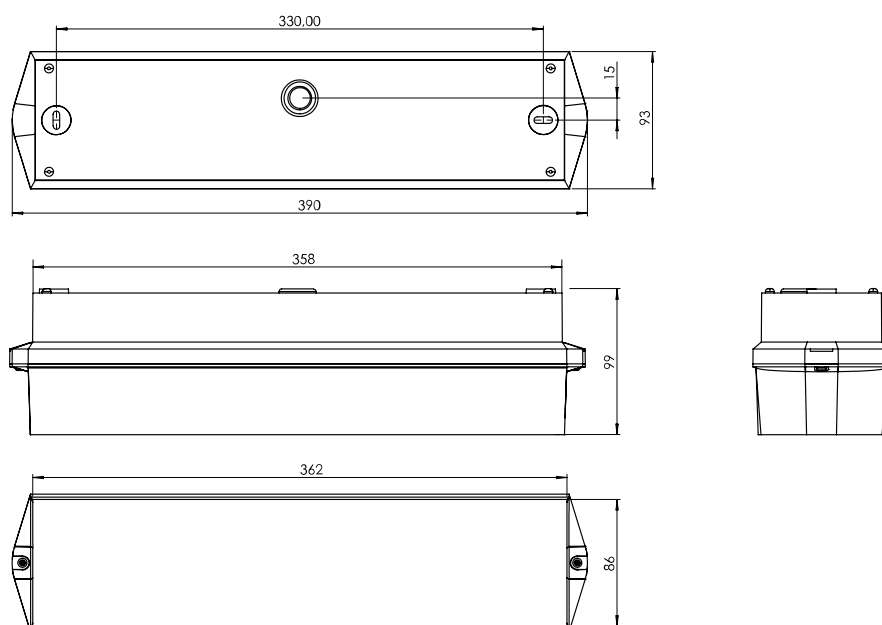

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emergency luminaire KWI Wireless 4x1W ERT-LED 8h 230V wall	
With exchangeable lenses, corridor lenses in scope of delivery included, LiFePO4, wall surface mounting with pictogram on one side, viewing distance: 16m, IP65, IK06, protection class II, radio switchable, 245lm, WirelessControl Professional type	NLKWIW438W
Optionele toebehoren	
KW Korf balbescherming	NLBKW
KWI Pictogrammen (pijlen boven, onder, links, rechts)	NLKWIPKTO
Set pictogrammen volgens ISO7010	
Pendelpaar 500mm bedraad wit	NL2PW
Wandbeugel voor KB/ KX/ KW/ KCD/ KE/ GX/ RX wit	NLAWX001
Set 2 accus LiFePO4 3,2V 3,3Ah f. luminaires. w. LEO or LPK	NLAKKU323L
LiFePO4 - Lithium-iron phosphate battery , UN3480 - UN 3480 : Lithium-Ion batteries	
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV