


KWI Noodverlichting Wireless 4x1W ERT-LED 3h wand TT

With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, with exchangeable lenses, corridor lenses in scope of delivery included, wall surface mounting with pictogram on one side, viewing distance: 16m, IP65, IK06, protection class II, radio switchable, 520lm, WirelessControl Professional type




Technische Daten

Netto lengte (mm)	390,00
Breedte (mm)	93,00
Hoogte (mm)	99,00
Nettogewicht (kg)	1,30
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessControl lage temperatuur
Productgroep	Kunststof verlichting
Design	KWI
Halogeenvrij	Behuizing van halogeenvrij kunststof
Kleur	RAL 9003

Technische Daten - Fortsetzung

Pictogrammen	Set pictogrammen (pijl links, rechts, onder, boven) conform ISO 7010
Detectie afstand (m)	16
Autonomietijd (h)	3
Lichtmiddel	ERT-LED (4W)
Lumen	520
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Continu vermogen (W)	5,70
Standby vermogen (W)	0,80
Maximaal vermogen (W)	7,50
Type batterij (V/Ah)	LiFePO4 2x 3,2V/ 3,3Ah-TT
Beschermingsgraad	IP65
Slagvastheid	IK06
Bevestiging	Wandbevestiging Plafondmontage
Omgevingstemperatuur min. (°C)	-15
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Dimensions (mm)

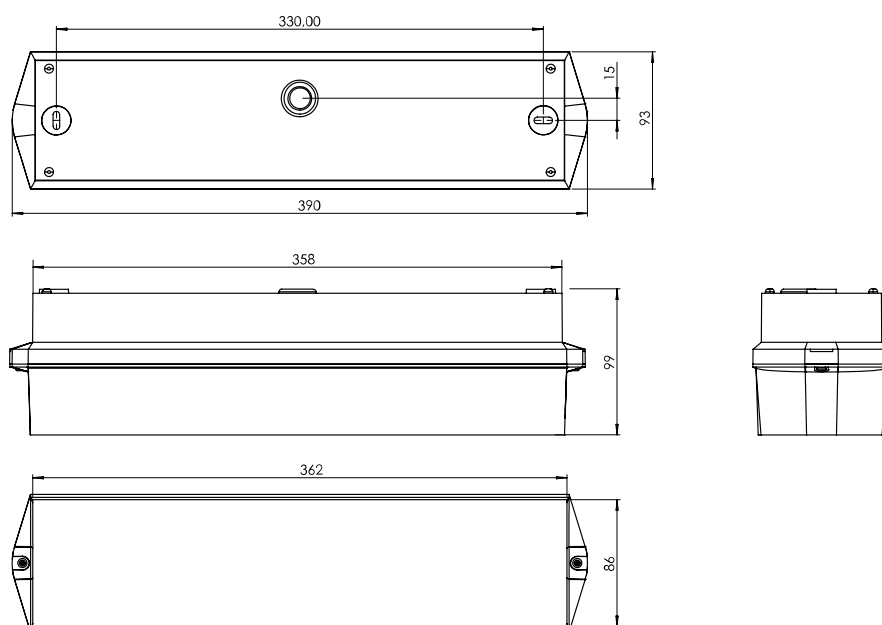

Spacing table with corridor lenses (included in scope delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	3,81	9,78	8,65	7,44	2,95
2,50	4	10,44	9,29	8,06	3,12
3,00	4,1	10,93	9,77	8,52	3,21
3,50	4,12	11,28	10,11	8,84	3,22
4,00	4,06	11,52	10,34	9,05	3,15
5,00	3,66	11,63	10,43	9,12	2,75
6,00	2,66	11,29	10,08	8,75	1,78

Spacing table without lenses - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	3,8	9,67	8,94	8,12	3,26
2,50	4,03	10,41	9,68	8,85	3,49
3,00	4,18	10,98	10,25	9,42	3,64
3,50	4,25	11,43	10,68	9,86	3,71
4,00	4,26	11,76	11	10,18	3,72
5,00	4,06	12,1	11,33	10,51	3,53
6,00	3,52	12,05	11,26	10,46	2,99
7,00	2,34	11,59	10,81	10,03	1,85

Artikeltabelle

BEZEICHNUNG	BEST.NR.
KWI Noodverlichting Wireless 4x1W ERT-LED 3h wand TT With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, with exchangeable lenses, corridor lenses in scope of delivery included, wall surface mounting with pictogram on one side, viewing distance: 16m, IP65, IK06, protection class II, radio switchable, 520lm, WirelessControl Professional type	NLKWWT33W
Optionele toebehoren	
KW Korf balbescherming	NLBKW
KWI Pictogrammen (pijlen boven, onder, links, rechts) Set pictogrammen volgens ISO7010	NLKWIPKTO
Pendelpaar 500mm bedraad wit	NL2PW
Wandbeugel voor KB/ KX/ KW/ KCD/ KE/ GX/ RX wit	NLAWX001
Batterij LiFePO4 3.2V 3.3Ah lage temperatuur LiFePO4 - Lithium-iron-phosphate battery suitable for low temperatures, UN3480 - LITHIUM-ION BATTERIES, The permissible ambient luminaire temperatures are specified for the low temperature luminaires	NLAKKU323T
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV