


Emergency luminaire KW Autotest 4x1W ERT-LED 3h 230V wall

With exchangeable lenses, corridor lenses in scope of delivery included, wall surface mounting with pictogram on one side, viewing distance: 16m, IP54, protection class II, with LiFePO4 battery, 1h: 520lm; 3h: 520lm; 8h: 200lm




Technische Daten

Netto lengte (mm)	390,00
Breedte (mm)	93,00
Hoogte (mm)	99,00
Nettogewicht (kg)	0,80
Type verlichting	Gecombineerde veiligheid en noodverlichting Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	Noodverlichting met autotest
Type toestel	Kunststof verlichting
Design	KW
Halogeenvrij	Behuizing van halogeenvrij kunststof
Afwerking	Wit

Technische Daten - Fortsetzung

Detectie afstand (m)	16
Autonomietijd (h)	3
Lichtmiddel	ERT-LED (4W)
Lumen	1h: 520;3h: 520;8h: 200
Nominale spanning (V)	230VAC 50Hz ±20%
Batterij type (V/Ah)	LiFePO4 2x 3,2V/ 3,3Ah
Beschermingsgraad	IP54
Bevestiging	Wandaanbouw Plafondmontage
Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Maattekening: Emergency luminaire KW Autotest 4x1W ERT-LED 3h 230V wall

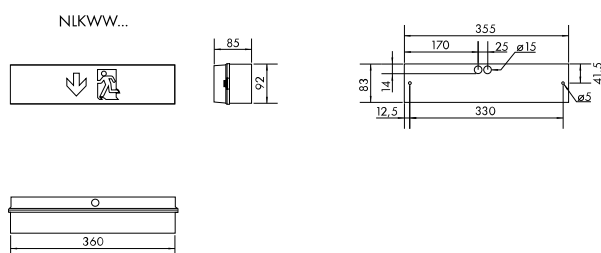

Abstandstabelle mit Korridorlinsen quer (im Lieferumfang enthalten) - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,80 - 1h/3h Autonomiezeit

Montagehöhe [m]					
2,00	3,86	9,86	8,65	7,44	2,95
2,50	4,05	10,51	9,29	8,06	3,12
3,00	4,15	11,00	9,77	8,52	3,21
3,50	4,17	11,36	10,11	8,84	3,22
4,00	4,10	11,59	10,34	9,05	3,15
5,00	3,70	11,70	10,42	9,12	2,74
6,00	2,74	11,36	10,08	8,74	1,78

Abstandstabelle ohne Linsen (Werksauslieferung)- Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,80 - 1h/3h Autonomiezeit

Montagehöhe [m]					
2,00	3,84	9,73	8,94	8,12	3,26
2,50	4,07	10,47	9,68	8,85	3,49
3,00	4,22	11,04	10,25	9,42	3,64
3,50	4,29	11,49	10,68	9,86	3,71
4,00	4,30	11,81	11,01	10,18	3,72
5,00	4,10	12,14	11,34	10,50	3,52
6,00	3,56	12,10	11,28	10,46	3,00
7,00	2,42	11,66	10,82	10,02	1,90

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emergency luminaire KW Autotest 4x1W ERT-LED 3h 230V wall	
With exchangeable lenses, corridor lenses in scope of delivery included, wall surface mounting with pictogram on one side, viewing	NLKWW433SC
distance: 16m, IP54, protection class II, with LiFePO4 battery, 1h: 520lm; 3h: 520lm; 8h: 200lm	
Optionele toebehoren	
KW Korf balbescherming	NLBKW
Pendelpaar 500mm bedraad wit	NL2PW
Wandbeugel voor KB/ KX/ KW/ KCD/ KE/ GX/ RX wit	NLAWX001
Set 2 accus LiFePO4 3,2V 3,3Ah f. luminaires. w. LEO or LPK	
LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU323L