

Datenblatt für Artikel: NLLMW403WL

Emergency luminaire LM WL 6x0,5W LED 3h 230VAC wall mounting

Wall surface mounting, 3h autonomy time, viewing distance: 22m, LiFePO₄ battery, radio switchable, WirelessControl Professional type



Technische Daten


Netto lengte (mm)	258,00
Breedte (mm)	62,00
Hoogte (mm)	147,00
Nettogewicht (kg)	1,10
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessControl Professional
Productgroep	Aluminium profielarmatuur
Design	LM
Kleur	Zilver
Pictogrammen	Set pictogrammen (pijl links, rechts, onder, boven) conform ISO 7010
Detectie afstand (m)	22
Autonomietijd (h)	3

Technische Daten - Fortsetzung

Lichtmiddel	LED (3W)
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Continu vermogen (W)	3,50
Standby vermogen (W)	0,80
Maximaal vermogen (W)	4,70
Type batterij (V/Ah)	LiFePO4 3,2V/ 1,2Ah
Beschermingsgraad	IP40
Slagvastheid	IK03
Bevestiging	Wandbevestiging
Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack


Dimensions (mm)

NLLMW...

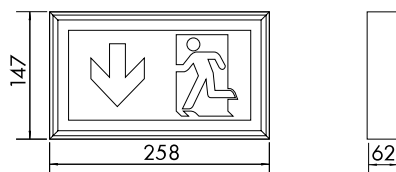

Drilling distances (mm)

NLLMW...

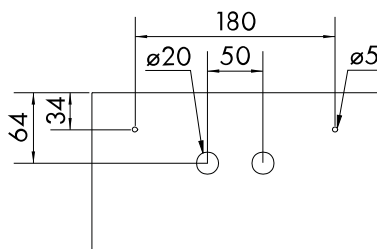

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emergency luminaire LM WL 6x0,5W LED 3h 230VAC wall mounting Wall surface mounting, 3h autonomy time, viewing distance: 22m, LiFePO4 battery, radio switchable, WirelessControl Professional NLLMW403WL type	
Optionele toebehoren	
Korf balbescherming KD/ KM/ KS/ LM LxHxB 320x220x120mm	NLBALL1
Set 2 accus LiFePO4 3,2V 1,2Ah f. WirelessControl lum. w.LEO LiFePO4 - Lithium-iron phosphate battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU321L
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV