

Emergency luminaire OM OLED 230V AC/DC ML one sided ceiling


Incl. standard pictogram set, with integrated adjustable ceiling short pendant, convertible to wall bracket mounting, with single luminaire supervision and mixed operation; viewing distance: 20m



Technische Daten

Netto lengte (mm)	222,00
Hoogte (mm)	127,00
Diepte (mm)	40,00
Nettogewicht (kg)	0,20
Type verlichting	Noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	Met bewaking en centrale bediening
Uitvoering	Ring licht
Design	OM
Halogeenvrij	Behuizing van halogeenvrij kunststof
Afwerking	Aluminium geanodiseerd
Detectie afstand (m)	20
Lichtmiddel	OLED
Spanningsbereik (V)	230VAC 50Hz ±20%; 230VDC ±20%
Beschermingsgraad	IP20
Bevestiging	Pendelinbouw
Omgevingstemperatuur min. (°C)	0
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA5

Dimensions (mm)

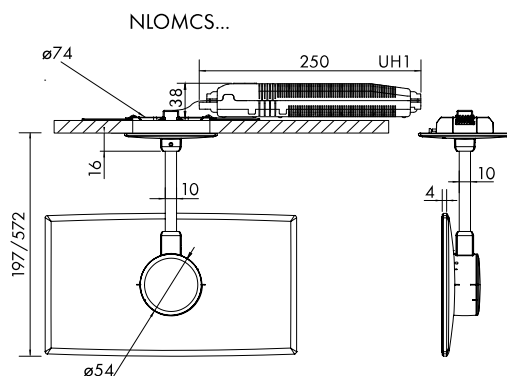

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emergency luminaire OM OLED 230V AC/DC ML one sided ceiling Incl. standard pictogram set, with integrated adjustable ceiling short pendant, convertible to wall bracket mounting, with single luminaire supervision and mixed operation; viewing distance: 20m	NLOMCS009M
Optionele toebehoren	
Pendant for Design OM, 500 mm aluminium, prewired can be shortened according to requirements	NLOM1PA