

Emerg. luminaire PM WirelessControl 4x1W ERT-LED 8h 230V AC

With exchangeable lenses, corridor lenses in scope of delivery included, safety luminaire, ceiling surface mounting, radio switchable, with LiFePO4 battery, 245lm




Technische Daten

Netto lengte (mm)	236,00
Breedte (mm)	136,00
Hoogte (mm)	65,00
Nettogewicht (kg)	0,90
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessControl Professional
Productgroep	Kunststof verlichting
Design	PM
Halogeenvrij	Behuizing van halogeenvrij kunststof
Kleur	RAL 9003
Detectie afstand (m)	20
Autonomietijd (h)	8

Technische Daten - Fortsetzung

Lichtmiddel	ERT-LED (4W)
Lumen	245
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Continu vermogen (W)	5,70
Standby vermogen (W)	0,80
Maximaal vermogen (W)	7,50
Type batterij (V/Ah)	LiFePO4 2x 3,2V/ 3,3Ah
Beschermingsgraad	IP65
Slagvastheid	IK06
Bevestiging	Plafondmontage Plafondinbouw mogelijk
Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Afmetingen (mm)

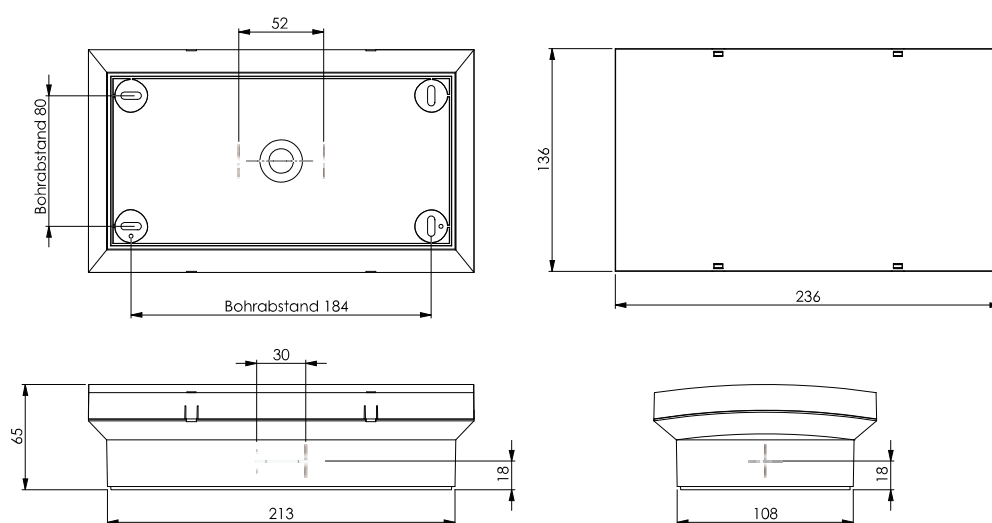

Spacing table with corridor lenses (included in scope delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	2,7	10,48	7,17	4,17	1,48
2,50	2,4	10,38	6,16	4,27	1,44
3,00	1,46	9,17	5,74	4,3	1,21

Spacing table with round lenses (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	2,74	7,43	7,43	7,43	2,74
2,50	1	7,19	7,19	7,19	1

Spacing table with spot lenses (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	1,59	3,67	3,67	3,67	1,59
2,50	1,89	4,29	4,29	4,29	1,89
3,00	2,12	4,84	4,84	4,84	2,12
3,50	2,3	5,4	5,4	5,4	2,3
4,00	2,42	5,88	5,88	5,88	2,42
5,00	2,49	6,61	6,61	6,61	2,49
6,00	2,33	7,04	7,04	7,04	2,33
7,00	1,98	7,12	7,12	7,12	1,98
8,00	1,33	6,89	6,89	6,89	1,33

Spacing table with high corridor lenses (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	3,02	7,48	4,91	2,34	0,82
2,50	3,28	8,41	5,25	2,25	0,88
3,00	3,43	9,1	5,5	2,38	0,95
3,50	3,56	9,63	5,69	2,48	1
4,00	3,6	9,94	5,82	2,65	1,02
5,00	3,42	10,45	5,97	2,84	1,02
6,00	2,85	10,56	5,75	2,93	0,89
7,00	1,84	10,18	5,09	2,91	0,65

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emerg. luminaire PM WirelessControl 4x1W ERT-LED 8h 230V AC	
With exchangeable lenses, corridor lenses in scope of delivery included, safety luminaire, ceiling surface mounting, radio switchable, with LiFePO4 battery, 245lm	NLPMW438WL
Optionele toebehoren	
PM Inbouwkader noodverlichting wit	
Uitsnijding plafond: 246x152mm	NLPME
Set 2 accus LiFePO4 3,2V 3,3Ah f. luminaires. w. LEO or LPK	
LiFePO4 - Lithium-iron phosphate battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU323L
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV