

Emergency luminaire WER ERT-LED 1x1W 230V AC/DC EL

Wall recessed mounting, Zinc die-cast, colour: white, with supervision - centrally switchable, recessed mounting with adapter frame in switch box Ø68mm, 140lm



Technische Daten

Netto lengte (mm)	90,00
Hoogte (mm)	90,00
Diepte (mm)	21,00
Nettogewicht (kg)	0,18
Type verlichting	Noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	Met bewaking en centrale bediening
Productgroep	Verlichting metaal
Design	WER
Kleur	RAL 9003
Lichtmiddel	ERT-LED (1W)
Lumen	140
Nominale spanning (V)	230VAC 50Hz ±20%; 230VDC ±20%
Continu vermogen (W)	2,10
Standby vermogen (W)	0,70
Maximaal vermogen (W)	2,10
Beschermingsgraad	IP20
Slagvastheid	≥ IK03
Bevestiging	Wandinbouw
Omgevingstemperatuur min. (°C)	-20
Omgevingstemperatuur max. (°C)	40

Technische Daten - Fortsetzung


AA Klasse E 8101

AA4


Leverancier

Schrack


Dimensions (mm)

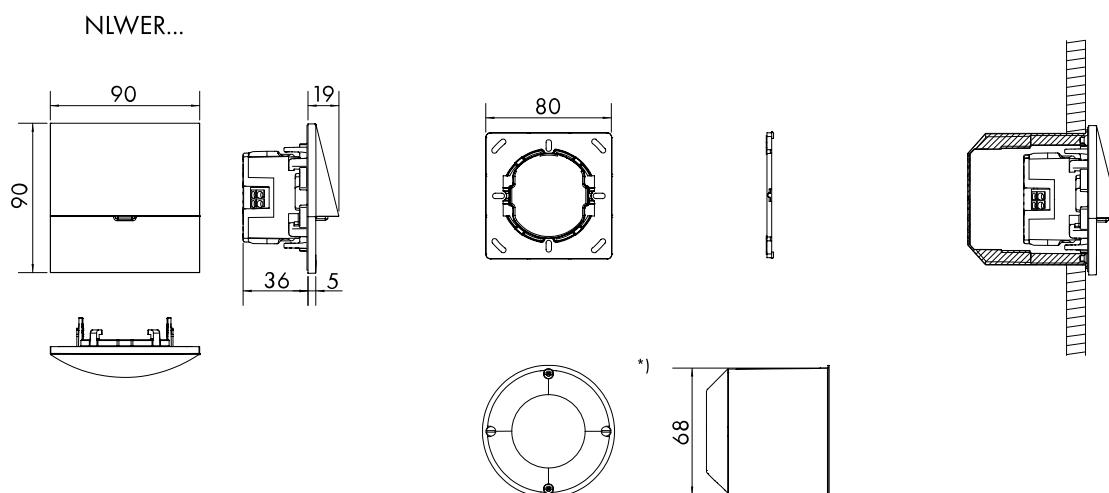

Floor plan illumination for wall mounting with mounting height 2,0m, maintenance factor 0,8

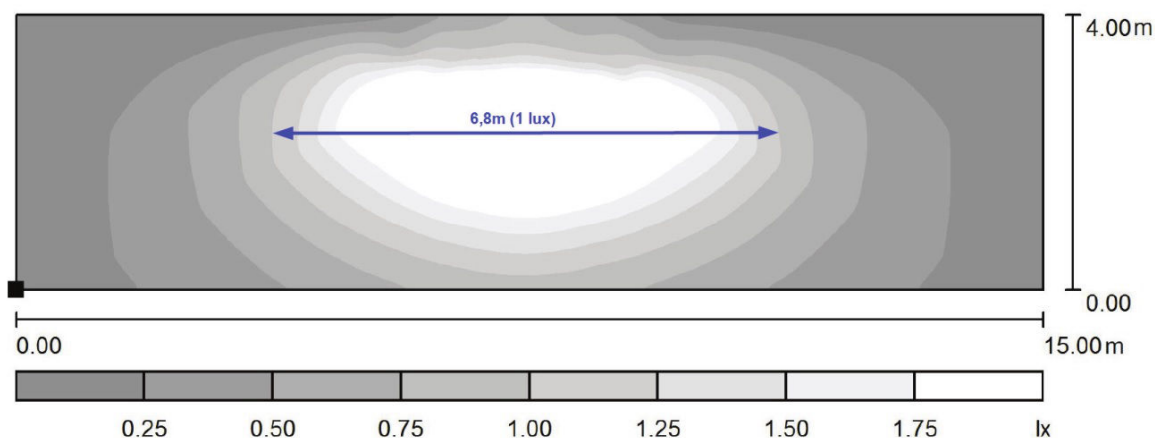

Floor plan illumination for wall mounting with mounting height 0,5m, maintenance factor 0,8

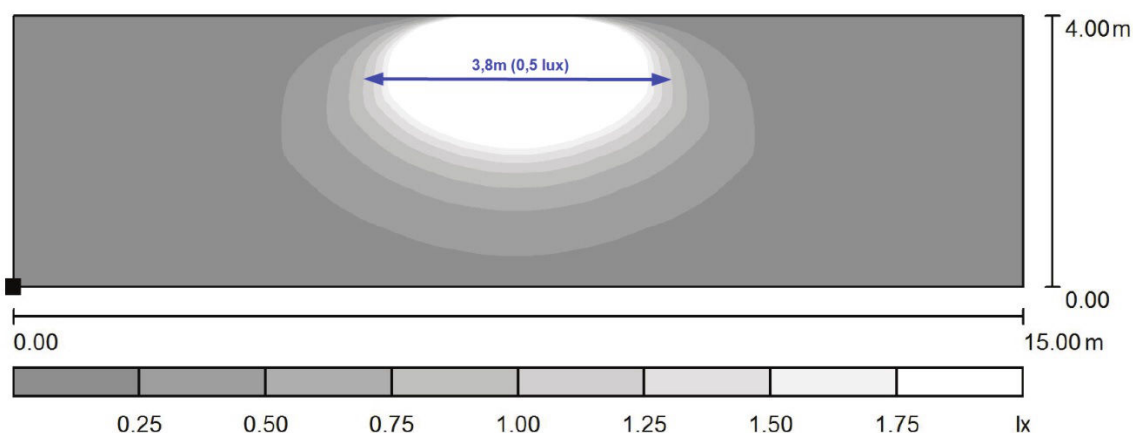

BEZEICHNUNG	BEST.NR.
-------------	----------

Emergency luminaire WER ERT-LED 1x1W 230V AC/DC EL

Wall recessed mounting, Zinc die-cast, colour: white, with supervision - centrally switchable, recessed mounting with adapter frame NLWERW29EL in switch box Ø68mm, 140lm