

Emergency luminaire WHG EL LED IP65 230V, ceiling mount

Ceiling-mounted, optional: rope or chain mounting, with bayonet catch, with 4 x 1 W High Power LED, IP65, pictograms with arrows: left, down, right are already mounted, viewing distance: 50m




Technische Daten

Netto lengte (mm)	522,00
Breedte (mm)	500,00
Hoogte (mm)	280,00
Nettogewicht (kg)	4,19
Type verlichting	Noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	Met bewaking en centrale bediening
Productgroep	Kunststof verlichting
Design	WHG
Kleur	RAL 9003
Pictogrammen	Set pictogrammen (pijl links, rechts, onder) conform ISO 7010
Detectie afstand (m)	50

Technische Daten - Fortsetzung

Lichtmiddel	HP-LED (4W)
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$; 230VDC $\pm 20\%$
Continu vermogen (W)	5,20
Standby vermogen (W)	1,10
Maximaal vermogen (W)	5,20
Beschermingsgraad	IP65
Slagvastheid	$\geq$ IK03
Bevestiging	Plafondmontage
Omgevingstemperatuur min. ($^{\circ}$ C)	-20
Omgevingstemperatuur max. ($^{\circ}$ C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Dimensions (mm)

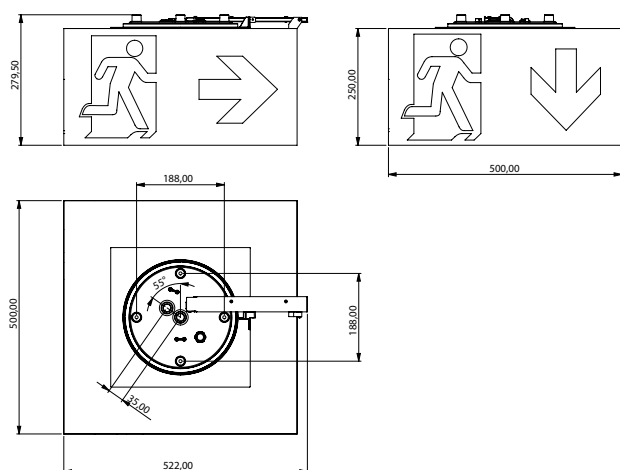

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emergency luminaire WHG EL LED IP65 230V, ceiling mount	
Ceiling-mounted, optional: rope or chain mounting, with bayonet catch, with 4 x 1W High Power LED, IP65, pictograms with arrows: left, down, right are already mounted, viewing distance: 50m	NLWHGD009E
Optionele toebehoren	
WG/ WX Kettingophanging noodverlichting 500mm bedrading	
Pendelophanging van noodverlichtingen voorzien voor plafondmontage	NLWKO
Design-Y-Cord suspension 4000mm for cube luminaires WHX, WHG	
Tool-free length adjustment	NLDSAY4M
Design-Y-Cord suspension 4000mm for cube luminaires WHX, WHG	
With ceiling adapter for surface mounting, tool-free length adjustment	NLDSAY4MAP