

Emergency luminaire WHX WL LED IP65 3h 230V AC ceiling mount

Ceiling-mounted, optional: rope or chain mounting, with bayonet catch, with 4 x 1 W High Power LED, IP65, 3h autonomy time; pictograms with arrows: left, down, right are already mounted, viewing distance: 30m, LiFePO₄ battery, radio switchable, WirelessControl Professional type






Technische Daten

Netto lengte (mm)	300,00
Breedte (mm)	300,00
Hoogte (mm)	179,50
Nettogewicht (kg)	1,74
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	Noodverlichting met autotest
Productgroep	Kunststof verlichting
Design	WHX
Halogeenvrij	Behuizing van halogeenvrij kunststof
Kleur	Wit

Technische Daten - Fortsetzung

Pictogrammen	Set pictogrammen (pijl links, rechts, onder) conform ISO 7010
Detectie afstand (m)	30
Autonomietijd (h)	3
Lichtmiddel	HP-LED (4W)
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Continu vermogen (W)	5,70
Standby vermogen (W)	0,80
Maximaal vermogen (W)	7,50
Type batterij (V/Ah)	LiFePO4 2x 3,2V/ 3,3Ah
Beschermingsgraad	IP65
Slagvastheid	$\geq$ IK03
Bevestiging	Plafondmontage
Omgevingstemperatuur min. ($^{\circ}$ C)	-5
Omgevingstemperatuur max. ($^{\circ}$ C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Dimensions (mm)

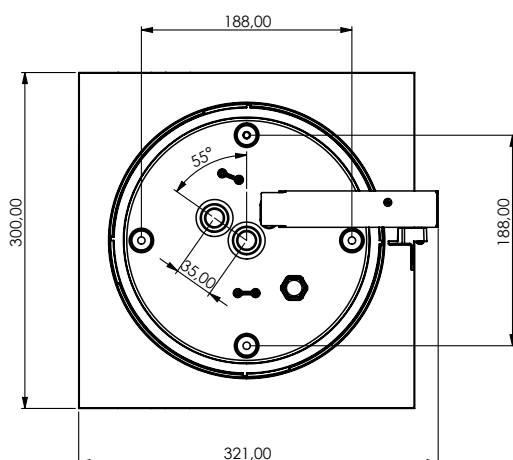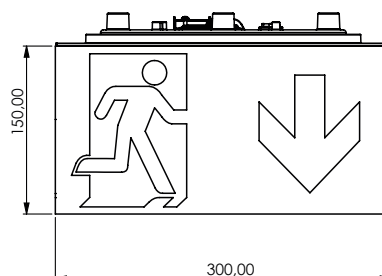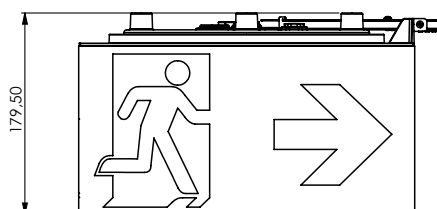

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emergency luminaire WHX WL LED IP65 3h 230V AC ceiling mount Ceiling-mounted, optional: rope or chain mounting, with bayonet catch, with 4 x 1W High Power LED, IP65, 3h autonomy time; pictograms with arrows: left, down, right are already mounted, viewing distance: 30m, LiFePO4 battery, radio switchable, WirelessControl Professional type	NLWHXD403W
Optionele toebehoren	
WG/ WX Kettingophanging noodverlichting 500mm bedrading Pendelophanging van noodverlichtingen voorzien voor plafondmontage	NLWKO
Design-Y-Cord suspension 4000mm for cube luminaires WHX, WHG Tool-free length adjustment	NLDSAY4M
Design-Y-Cord suspension 4000mm for cube luminaires WHX, WHG With ceiling adapter for surface mounting, tool-free length adjustment	NLDSAY4MAP
Set 2 accus LiFePO4 3,2V 3,3Ah f. luminaires. w. LEO or LPK LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU323L
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV