

XP Noodverlichting EX zone 1/21 LED 1h 230VAC

without pictogram, self control 1h, wall or ceiling surface mounting, IP66, 840lm, Required accessories: cable gland (NLXPKE), mounting bracket (NLXPMB), chain eyelets (NLXPKO), pictogram set (NLXPPIKTO)




Technische Daten

Netto lengte (mm)	485,00
Hoogte (mm)	197,00
Diepte (mm)	157,00
Nettogewicht (kg)	4,28
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	Noodverlichting met autotest
Productgroep	Noodverlichting Ex
Design	XP
Kleur	Grijs
Autonomietijd (h)	1
Lichtmiddel	LED (8W)

Technische Daten - Fortsetzung

Lumen	840
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Continu vermogen (W)	24
Standby vermogen (W)	3
Maximaal vermogen (W)	24
Type batterij (V/Ah)	LiFePO4 3,2V/ 3,0Ah
Beschermingsgraad	IP66
Slagvastheid	IK10
Bevestiging	Wandbevestiging Plafondmontage
Omgevingstemperatuur min. (°C)	0
Omgevingstemperatuur max. (°C)	50
AA Klasse E 8101	AA5

Dimensions (mm)

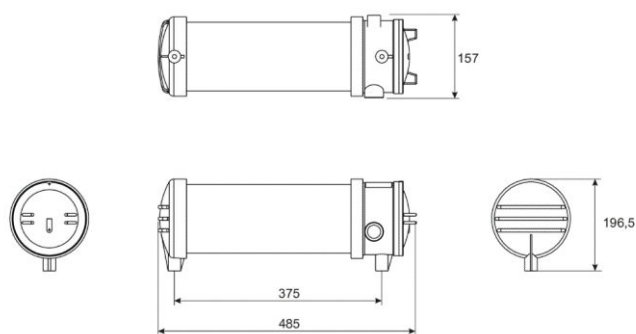

Artikeltabelle

BEZEICHNUNG	BEST.NR.
XP Noodverlichting EX zone1 /21 LED 1h 230VAC without pictogram, self control 1h, wall or ceiling surface mounting, IP66, 840lm, Required accessories: cable gland (NLXPKE), mounting bracket (NLXPMB), chain eyelets (NLXPKO), pictogram set (NLXPPIKTO)	NLXPIU411S
Optionele toebehoren	
XP Wartel met trekontlasting metaal Metaal	NLXPKE
XP Ogen ophanging set 2 stuks	NLXPKO
XP Montagebeugels set 2 stuks Wand- of plafondbevestiging	NLXPMB
XP Set pictogrammen links, rechts, boven, onder Bevestiging metaal	NLXPPIKTO