

Emergency luminaire ZA Wireless LED 3h 230V AC

Zinc die-cast, anthracite, IP65, -5° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries inside the luminaire, central switching, wall mounting, WirelessControl Professional type




Technische Daten

Netto lengte (mm)	315,00
Hoogte (mm)	140,00
Diepte (mm)	65,00
Nettogewicht (kg)	2,20
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessControl Professional
Productgroep	Verlichting metaal
Design	ZA
Kleur	Antraciet
Autonomietijd (h)	3
Lichtmiddel	LED (2W)
Lumen	170
Nominale spanning (V)	230VAC 50Hz ±20%
Continu vermogen (W)	3,90
Standby vermogen (W)	1,50
Maximaal vermogen (W)	5,30
Type batterij (V/Ah)	LiFePO4 3,2V/ 3,0Ah
Beschermingsgraad	IP65
Slagvastheid	IK08


Technische Daten - Fortsetzung

Bevestiging	Wandbevestiging
Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Dimensions (mm)

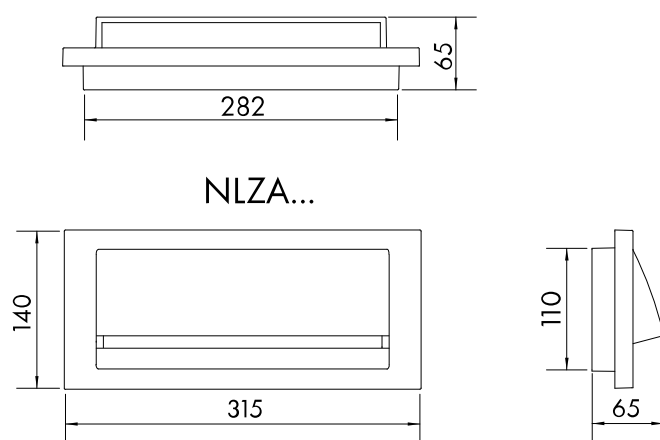

Drilling distances (mm)

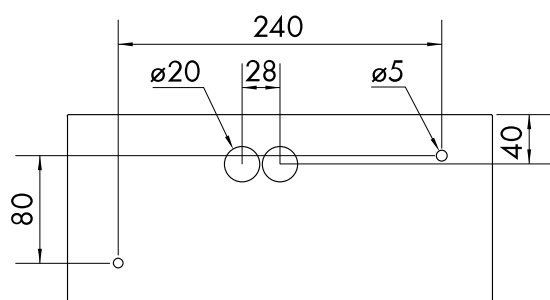

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,8, 3h Autonomiezeit

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emergency luminaire ZA Wireless LED 3h 230V AC Zinc die-cast, anthracite, IP65, -5° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries inside the luminaire, central switching, wall mounting, WirelessControl Professional type	NLZAA003WL
Optionele toebehoren	
Batterij LiFePO4 3,2V 3,3Ah voor KM, KSC, KMB, ASM, ZAW Vervangbatterij noodverlichting	NLAKKU3230