

Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect

Wall surface mounting, with LiFePO₄ battery, battery in external housing for mounting outside the cold area, emergency luminaire for illuminating round surfaces, with Bluetooth communication




Technische Daten

Netto lengte (mm)	315,00
Hoogte (mm)	140,00
Diepte (mm)	65,00
Nettogewicht (kg)	2,20
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessConnect Professional Cool Versie
Type toestel	Verlichting metaal
Design	ZA
Afwerking	Antraciet
Autonomietijd (h)	8
Lichtmiddel	LED (2W)


Technische Daten - Fortsetzung

Lumen	76
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Batterij type (V/Ah)	LiFePO4 3,2V/ 3,3Ah
Beschermingsgraad	IP65
Bevestiging	Wandaanbouw
Omgevingstemperatuur min. ($^{\circ}\text{C}$)	-25
Omgevingstemperatuur max. ($^{\circ}\text{C}$)	40
AA Klasse E 8101	AA3 AA4 AA5
Leverancier	Schrack


Abmessungen (mm)

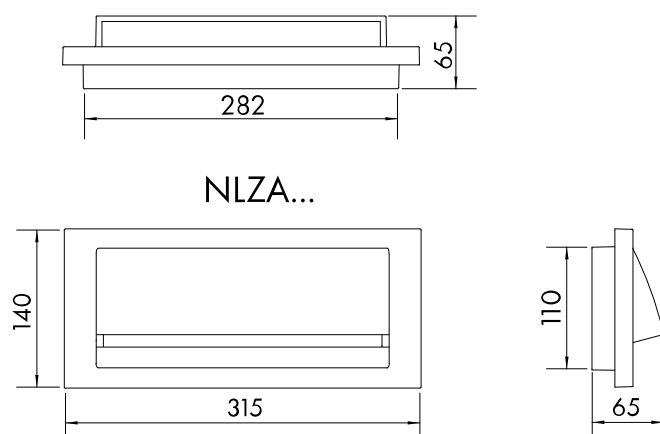

Bohrabstände (mm)

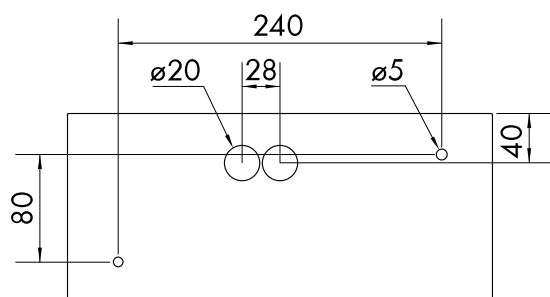

Gehäuse IP54 für COOL-Ausführung (mm)

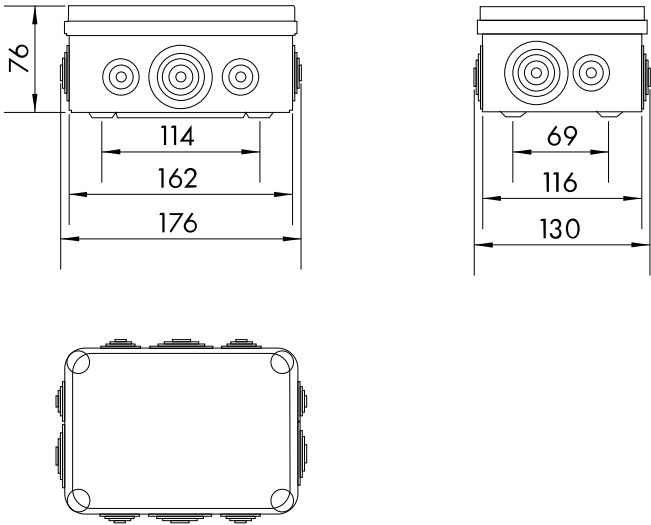

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,80 -8h Autonomiezeit

Montagehöhe [m]					
2,00	0,00	2,20	4,12	8,52	3,20
2,50	0,00	2,18	2,59	8,11	1,62
3,00	0,00	2,13	0,54	6,42	0,00
3,50	0,00	1,90	0,21	3,00	0,00
4,00	0,00	0,00	0,00	0,00	0,00

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect Wall surface mounting, with LiFePO4 battery, battery in external housing for mounting outside the cold area, emergency luminaire for illuminating round surfaces, with Bluetooth communication	NLZAAC08WB
Optionele toebehoren	
Batterij LiFePO4 3,2V 3,3Ah voor KM, KSC, KMB, ASM, ZAW Vervangbatterij noodverlichting	NLAKKU3230