

Emerg.lum.ZA 4x0,5W HighPower LED 3h 230V AC WirelessConnect

Wall surface mounting, with LiFePO₄ battery, emergency luminaire for illuminating round surfaces, with Bluetooth communication, 170lm



Technische Daten

Netto lengte (mm)	315,00
Hoogte (mm)	140,00
Diepte (mm)	65,00
Nettogewicht (kg)	2,20
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessConnect
Productgroep	Verlichting metaal
Design	ZA
Kleur	Wit
Autonomietijd (h)	3
Lichtmiddel	LED (2W)
Lumen	170


Technische Daten - Fortsetzung

Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Continu vermogen (W)	3,90
Standby vermogen (W)	1,50
Maximaal vermogen (W)	5,30
Type batterij (V/Ah)	LiFePO4 3,2V/ 3,3Ah
Beschermingsgraad	IP65
Slagvastheid	IK08
Bevestiging	Wandbevestiging
Omgevingstemperatuur min. ($^{\circ}\text{C}$)	-5
Omgevingstemperatuur max. ($^{\circ}\text{C}$)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Abmessungen (mm)



Bohrabstände (mm)

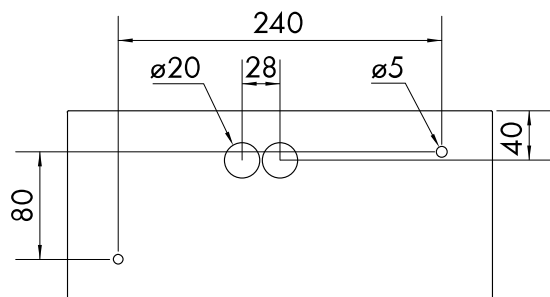

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emerg.lum.ZA 4x0,5W HighPower LED 3h 230V AC WirelessConnect Wall surface mounting, with LiFePO4 battery, emergency luminaire for illuminating round surfaces, with Bluetooth communication, 170lm	NLZAW003WB
Optionele toebehoren	
Batterij LiFePO4 3,2V 3,3Ah voor KM, KSC, KMB, ASM, ZAW Vervangbatterij noodverlichting	NLAKKU3230