

Datenblatt für Artikel: NLZAW008WB

Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect

Wall-mounted, with LiFePO₄ battery, emergency luminaire for illuminating round surfaces, with Bluetooth communication, 85lm



Technische Daten

Netto lengte (mm)	315,00
Hoogte (mm)	140,00
Diepte (mm)	65,00
Nettogewicht (kg)	2,20
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessConnect
Productgroep	Verlichting metaal
Design	ZA
Afwerking	RAL 9003
Autonomietijd (h)	8
Lichtmiddel	LED (2W)
Lumen	85


Technische Daten - Fortsetzung

Nominale spanning (V)	230VAC 50Hz ±20%
Continu vermogen (W)	3,90
Standby vermogen (W)	1,50
Maximaal vermogen (W)	5,30
Type batterij (V/Ah)	LiFePO4 3,2V/ 3,3Ah
Beschermingsgraad	IP65
Slagvastheid	IK08
Bevestiging	Wandbevestiging
Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Abmessungen (mm)



Bohrabstände (mm)

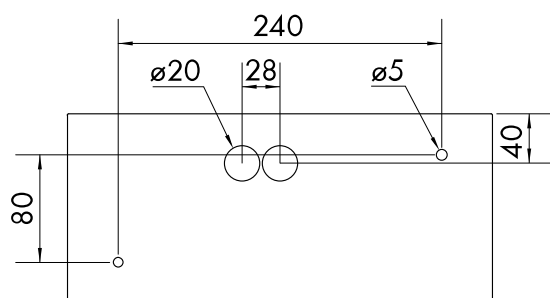

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 8h Autonomiezeit

					
2,00	0,11	2,3	0,56	7,51	2,07
2,50	0,05	2,31	0,54	7,16	1,8

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect	NLZAW008WB
Wall-mounted, with LiFePO4 battery, emergency luminaire for illuminating round surfaces, with Bluetooth communication, 85lm	
Optionele toebehoren	
Batterij LiFePO4 3,2V 3,3Ah voor KM, KSC, KMB, ASM, ZAW	NLAKKU3230
Vervangbatterij noodverlichting	