

Emergency luminaire ZA Wireless LED 3h 230V AC

Zinc die-cast, white, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, central switching, wall mounting, 170lm, WirelessControl Professional type



Technische Daten

Netto lengte (mm)	315,00
Hoogte (mm)	140,00
Diepte (mm)	65,00
Nettogewicht (kg)	2,20
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessControl lage temperatuur
Productgroep	Verlichting metaal
Design	ZA
Kleur	Wit
Autonomietijd (h)	3
Lichtmiddel	LED (2W)
Lumen	170
Nominale spanning (V)	230VAC 50Hz ±20%
Type batterij (V/Ah)	LiFePO4 3,2V/ 3,0Ah
Beschermingsgraad	IP65
Bevestiging	Wandbevestiging
Omgevingstemperatuur min. (°C)	-25
Omgevingstemperatuur max. (°C)	40

Technische Daten - Fortsetzung

AA Klasse E 8101

AA3

AA4

AA5


Leverancier

Schrack


Dimensions (mm)



Drilling distances (mm)

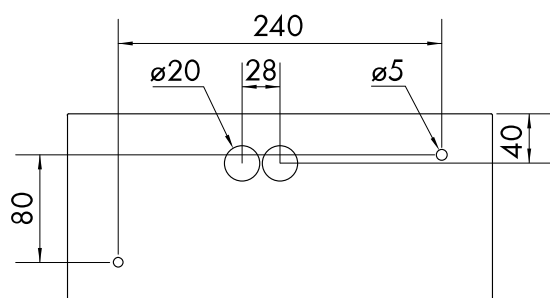

Housing IP54 for COOL-version (mm)

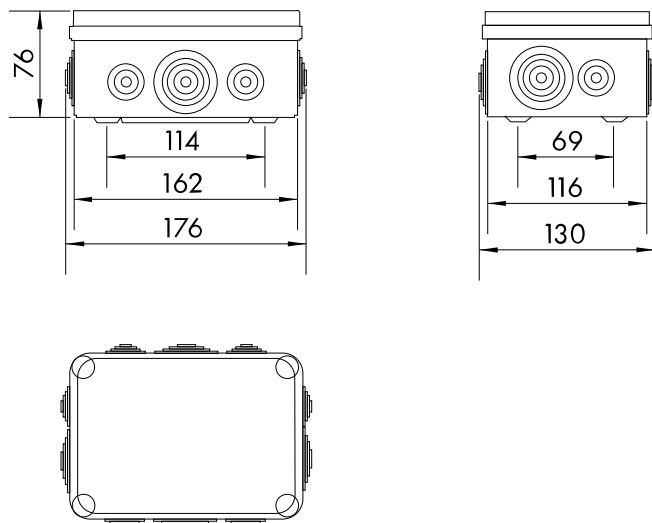

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emergency luminaire ZA Wireless LED 3h 230V AC Zinc die-cast, white, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, central switching, wall mounting, 170lm, WirelessControl Professional type	NLZAWC03WL
Optionele toebehoren	
Batterij LiFePO4 3,2V 3,3Ah voor KM, KSC, KMB, ASM, ZAW Vervangbatterij noodverlichting	NLAKKU3230