


# Emergency luminaire ZA WL LED 3h 230V AC wall mounting

Zinc die-cast, white, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery suitable for low temperatures, wall mounting, radio switchable, 190lm, WirelessControl Professional type




## Technische Daten

|                      |                                  |
|----------------------|----------------------------------|
| Netto lengte (mm)    | 315,00                           |
| Hoogte (mm)          | 140,00                           |
| Diepte (mm)          | 65,00                            |
| Nettogewicht (kg)    | 2,20                             |
| Type verlichting     | Noodverlichting                  |
| Type batterijvoeding | Autonome batterij                |
| Type toestel         | WirelessControl lage temperatuur |
| Productgroep         | Verlichting metaal               |
| Design               | ZA                               |
| Kleur                | Wit                              |
| Autonomietijd (h)    | 3                                |
| Lichtmiddel          | LED (2W)                         |

## Technische Daten - Fortsetzung

|                                |                        |
|--------------------------------|------------------------|
| Lumen                          | 190                    |
| Nominale spanning (V)          | 230VAC 50Hz $\pm 20\%$ |
| Continu vermogen (W)           | 3,90                   |
| Standby vermogen (W)           | 1,50                   |
| Maximaal vermogen (W)          | 5,30                   |
| Type batterij (V/Ah)           | LiFePO4-TT 3,2V/ 3,3Ah |
| Beschermingsgraad              | IP65                   |
| Slagvastheid                   | IK08                   |
| Bevestiging                    | Wandbevestiging        |
| Omgevingstemperatuur min. (°C) | -25                    |
| Omgevingstemperatuur max. (°C) | 40                     |
| AA Klasse E 8101               | AA3<br>AA4<br>AA5      |
| Leverancier                    | Schrack                |

## Dimensions (mm)

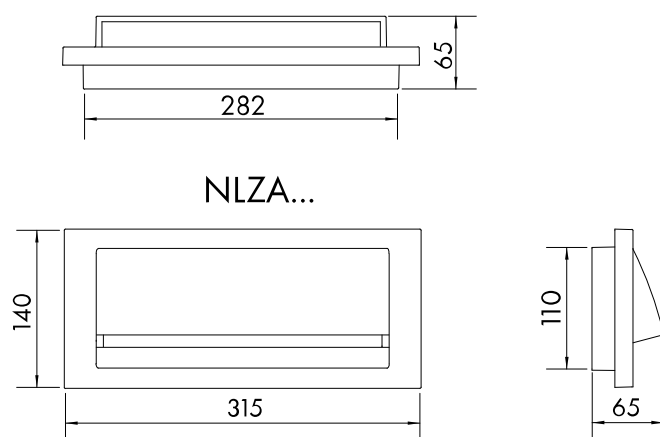

## Drilling distances (mm)



## Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

|  |  |  |  |  |  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 2,00                                                                              | 0,21                                                                              | 3,13                                                                              | 0,58                                                                              | 9,43                                                                                | 3,89                                                                                |
| 2,50                                                                              | 0,18                                                                              | 3,34                                                                              | 0,58                                                                              | 10,51                                                                               | 4,14                                                                                |
| 3,00                                                                              | 0,16                                                                              | 3,44                                                                              | 0,57                                                                              | 11,28                                                                               | 3,18                                                                                |
| 3,50                                                                              | 0,11                                                                              | 3,47                                                                              | 0,55                                                                              | 11,3                                                                                | 2,79                                                                                |
| 4,00                                                                              | 0,03                                                                              | 3,45                                                                              | 0,53                                                                              | 10,71                                                                               | 1,97                                                                                |

## Artikeltabelle

| BEZEICHNUNG                                                                                                                                                                                                                                                         | BEST.NR.   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Emergency luminaire ZA WL LED 3h 230V AC wall mounting<br>Zinc die-cast, white, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery suitable for low temperatures, wall mounting, NLZAWT03WL<br>radio switchable, 190lm, WirelessControl Professional type |            |
| <b>Optionele toebehoren</b>                                                                                                                                                                                                                                         |            |
| Batterij LiFePO4 3.2V 3.3Ah lage temperatuur<br>LiFePO4 - Lithium-iron-phosphate battery suitable for low temperatures, UN3480 - LITHIUM-ION BATTERIES, The permissible<br>ambient luminaire temperatures are specified for the low temperature luminaires          | NLAKKU323T |