


Datenblatt für Artikel: SR147822CS

SORAX 19" Colocation enclosure 47U, B=800xT=1.200xH=2.200mm

Colocation enclosure with 2 partition units, ventilated full door at the front, ventilated divided door at the rear, RAL9005

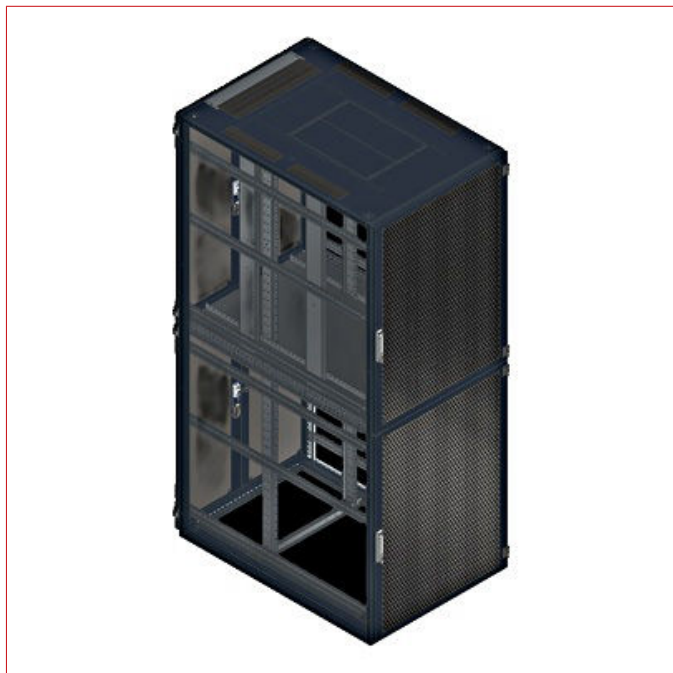

SCHRACK-Info

- Colocation enclosure with 2 partition units
- ventilated full door at the front
- ventilated divided door at the rear
- 1 x shelf with side bulkheads
- closed cable duct led from the top left side into the lower area
- roof panel with 2 separate cable outlets
- 23U per partition unit
- other dimensions and dividing units available on request
- RAL7035


Technische Daten

Breedte (mm)	800,00
Hoogte (mm)	2.200,00
Diepte (mm)	1.200,00
EAN CODE	9004840999457

Technische Daten - Fortsetzung

PRIJS	5.401,00
Kleur	RAL 9005
Hoogte eenheden	47
Leverancier	Schrack
Draagvermogen	2.000Kg
Type product	Servekasten
Bijkomend vereist	Side walls, bottom plate (as required)

Maattekening: SORAX 19"Colocationenclosure 47U, B=800xT=1.200xH=2.200mm

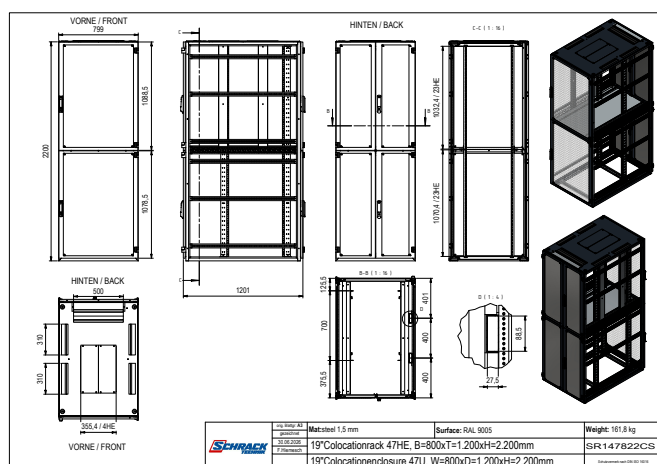

BEZEICHNUNG	BEST.NR.
SORAX 19"Colocationenclosure 47U, B=800xT=1.200xH=2.200mm	SR147822CS
Colocation enclosure with 2 partition units, ventilated full door at the front, ventilated divided door at the rear, RAL9005	