


Datenblatt für Artikel: SR1D24261S

SORAX Ventilated Door, W=600xH=2.000mm, RAL7035

Opening angle of the door 180° (aligned), compatible for mounting a TANlock swivelling lever

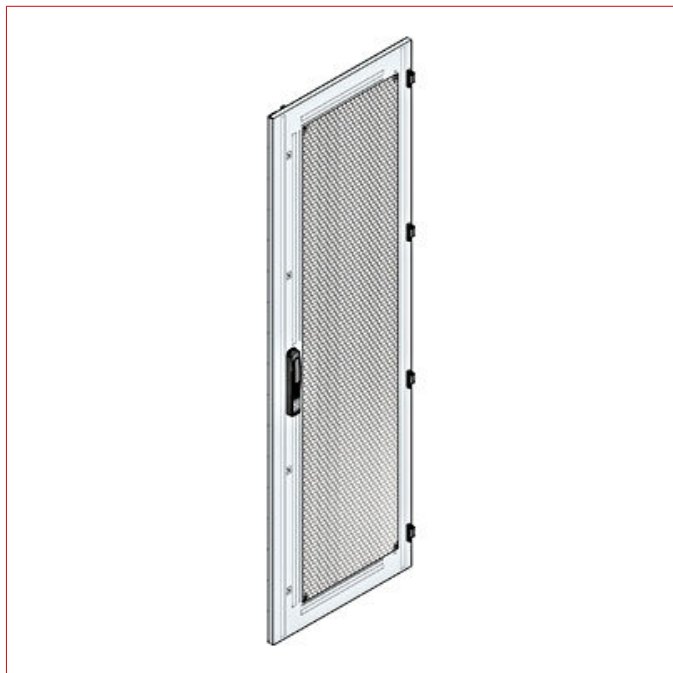

Produktinfo

- Ventilated door/ventilated (80% air flow)
- swivelling lever
- with rod lock
- Three-point locking
- door opening angle 180°
- optional right-hand or left-hand stop (Door hinge on the right as standard)
- compatible for mounting a TANlock swivelling lever
- incl. fastening device for neat cable routing
- RAL7035


Technische Daten

Breedte (mm)	600,00
Hoogte (mm)	2.000,00
Diepte (mm)	25,00
EAN CODE	9004840997095

Technische Daten - Fortsetzung

PRIJS	348,30
Kleur	RAL 7035
Type product	Stalen plaatdeur, geventileerd

Maattekening: SORAX Ventilated Door, W=600xH=2.000mm, RAL7035

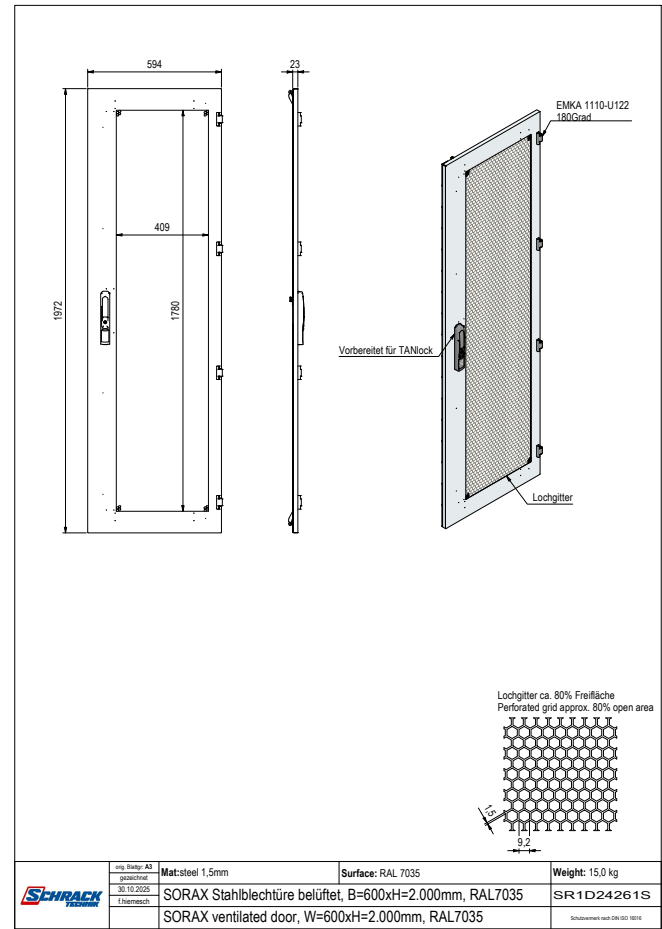

BEZEICHNUNG	BEST.NR.
SORAX Ventilated Door, W=600xH=2.000mm, RAL7035	SR1D24261S
Opening angle of the door 180° (aligned), compatible for mounting a TANlock swivelling lever	