

Datenblatt für Artikel: SR1D24282S

SORAX Ventilated Door, W=800xH=2.000mm, RAL9005

Opening angle of the door 180° (aligned), compatible for mounting a TANlock swivelling lever



Produktinfo

- Ventilated door/ventilated (80% air flow)
- swivelling lever
- with rod lock
- Three-point locking
- door opening angle 180°
- optional right-hand or left-hand stop (Door hinge on the right as standard)
- compatible for mounting a TANlock swivelling lever
- incl. fastening device for neat cable routing
- RAL9005


Technische Daten

Breedte (mm)	800,00
Hoogte (mm)	2.000,00
Diepte (mm)	25,00
EAN CODE	9004840999112

Technische Daten - Fortsetzung

PRIJS	359,70
Kleur	RAL 9005
Type product	Stalen plaatdeur, geventileerd

Maattekening: SORAX Ventilated Door, W=800xH=2.000mm, RAL9005

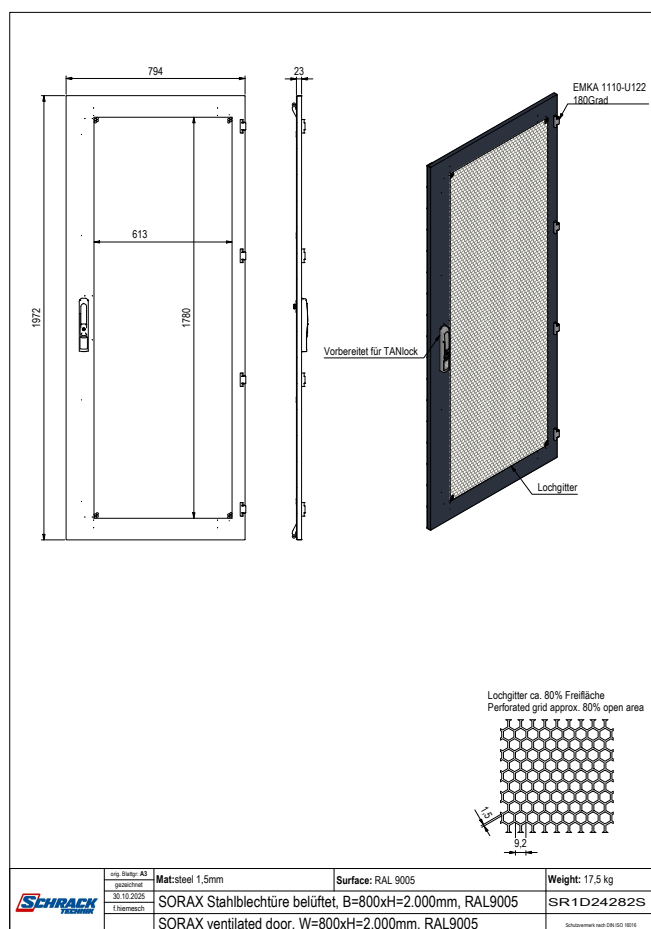

BEZEICHNUNG	BEST.NR.
SORAX Ventilated Door, W=800xH=2.000mm, RAL9005	SR1D24282S
Opening angle of the door 180° (aligned), compatible for mounting a TANlock swivelling lever	