

Datenblatt für Artikel: ISA05362--

ARROW-BLACK NH-Zekeringlastscheider 185mm GR2 3P 400A M12


Voorzien voor plaatsing stroomtransformatoren, M12



Technische Daten

Stroomwarmteverliezen (W)	52,00
Omgevingstemperatuur min. (°C)	-25
Omgevingstemperatuur max. (°C)	70
Breedte (mm)	100,00
Hoogte (mm)	664,00
Diepte (mm)	196,00
Nettogewicht (kg)	4,79
Optionele toebehoren	ISA05365--;ISA05366--;ISA05367--;ISA05369-A;ISA05376--

Afmetingen (mm)

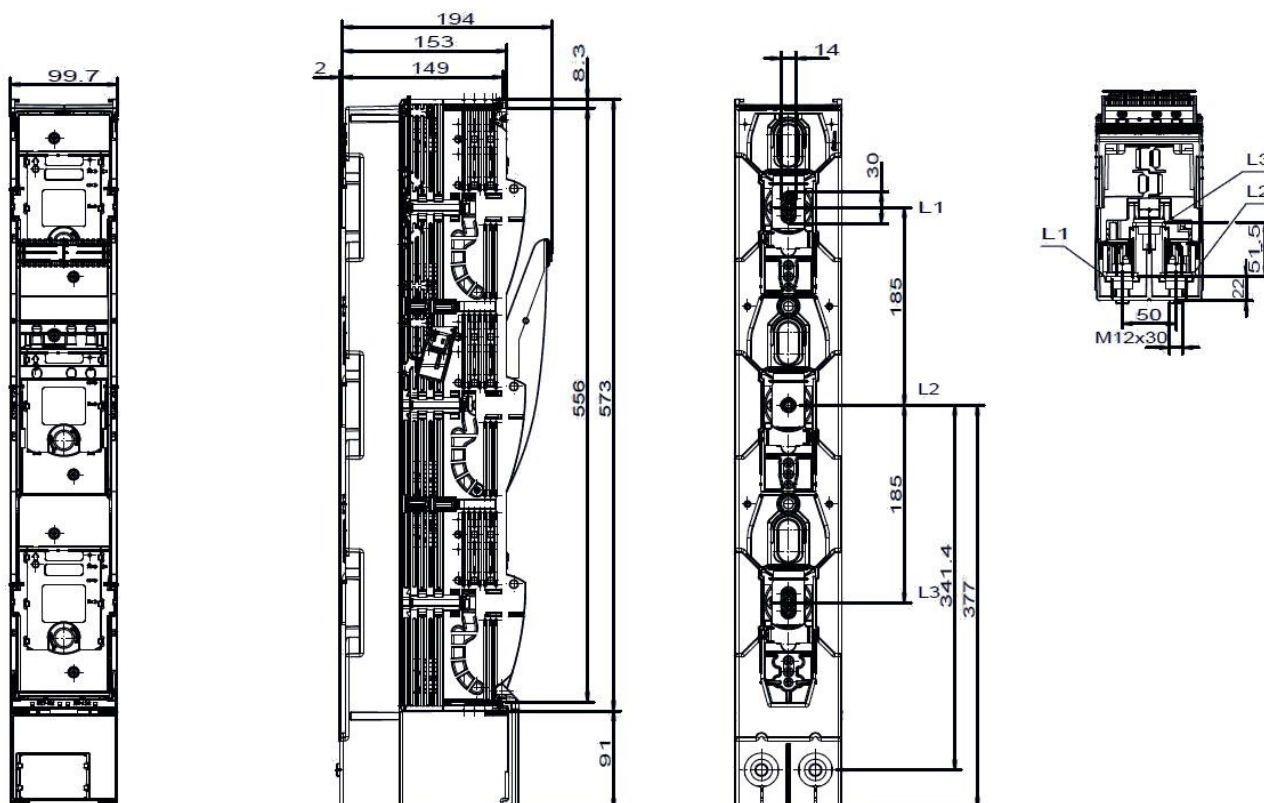

[mm]

Artikeltabelle

BEZEICHNUNG	KUPFERGEWICHT (kg/km)	BEST.NR.
ARROW-BLACK NH-Zekeringlastscheider 185mm GR2 3P 400A M12 Voorzien voor plaatsing stroomtransformatoren, M12		ISA05362
Optionele toebehoren		
ARROW-BLACK Stroomtransformator 150A/ 5A grootte 1-3 Voor zekeringsscheiders		ISA05365
ARROW-BLACK Stroomtransformator 250A/ 5A grootte 1-3 Voor zekeringsscheiders		ISA05366
ARROW-BLACK Stroomtransformator 400A/ 5A grootte 1-3 Voor zekeringsscheiders		ISA05367
ARROW-BLACK Set aansluiten stroomtransformator grootte 1-3 Kit for CT wiring with terminal block, for mounting size 1-3, for installation of current transformers mounting at top side of NH-strip-type fuse-switch-disconnectors, 6pole, 2.5mm ²	0,032	ISA05369-A
Busbar terminal for holeless mounting For holeless mounting of NH fuse load switchbars ARROW BLACK sizes 1, 2, 3 on 185mm busbar systems; three pieces are required per switch		ISA05376