

Datenblatt für Artikel: HLP29LM00F

# FO Patchkabel Duplex LC/UPC-LC/APC

## 9/ 125µm OS2 0,5m

LSOH geel



### SCHRACK-Info

Single mode patch cords are used for telecom networks and also used for high speed metropolitan and access network. The single-mode patch cables are equipped with an LSOH jacket. These comply with IEC or EIA-TIA standards. These singlemode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

#### FEATURES

- LC/UPC - LC/APC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Singlemode cabled fiber conforms to ITU-T G.657.A2, IEC 60793-2-50
- Duplex
- REACH, RoHS and SvHC materials compliant

#### APPLICATIONS


- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks

- ATM, SONET and WDM

## Technische Daten

|                                |                               |
|--------------------------------|-------------------------------|
| Productnormen                  | IEC 61300-3-4 / IEC 61300-3-6 |
| Connector standaard            | IEC 61754                     |
| FO aansluitingen               | LC/UPC- LC/APC                |
| Lengte patchsnoer (m)          | 0,50                          |
| Type vezels                    | 9/125µm OS2 singlemode        |
| Kabelmantel                    | LSOH                          |
| Kleur                          | Geel                          |
| Diameter (mm)                  | 2 x 2,2                       |
| Insertion loss typical (dB)    | ≤0,25                         |
| Return loss typical (dB)       | APC ≥60 / UPC ≥50             |
| Omgevingstemperatuur min. (°C) | -20                           |
| Omgevingstemperatuur max. (°C) | 60                            |
| Breedte (mm)                   | 150,00                        |
| Hoogte (mm)                    | 200,00                        |
| Nettogewicht (kg)              | 0,04                          |

## Maattekening: FO Patchkabel Duplex LC/UPC-LC/APC 9/ 125µm OS2 0,5m

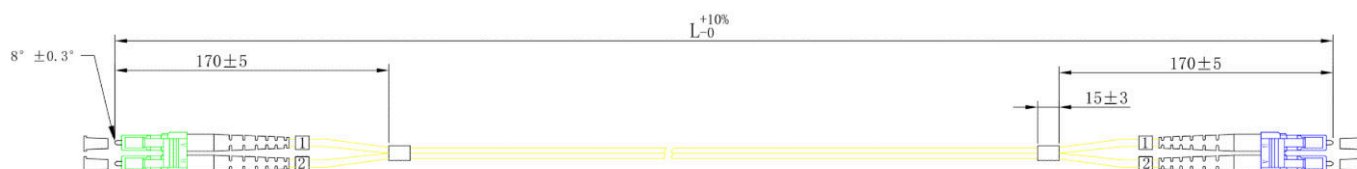

| BEZEICHNUNG                                                      | BEST.NR.   |
|------------------------------------------------------------------|------------|
| FO Patchkabel Duplex LC/UPC-LC/APC 9/125µm OS2 0,5m<br>LSOH geel | HLP29LM00F |