


Datenblatt für Artikel: HSELS12SLL

PREMIUM FO Splicebox 19" 1HE 16x pigtails LC 50/125µm OM5

RAL7035

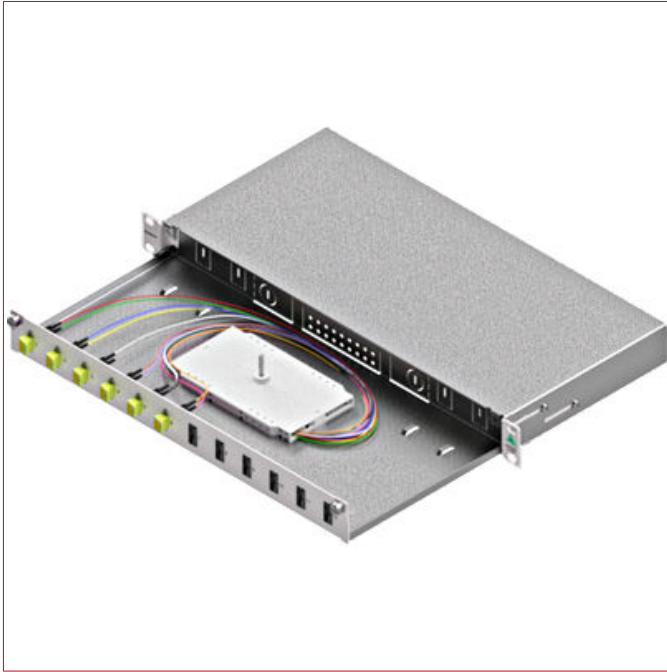

SCHRACK-Info

FO splice box extendable with quick release fastener and equipped with Grade B pigtails for splicing FO cables. The pull-out depth of 20 cm ensures easy access to the couplings. Furthermore the box can be set back by 40 mm. A possibility for the sloping input of section cables is integrated.

Properties Housing:

- 19", 1U installation, extendable
- incl. Depth adjustment
- front panel and side parts powder-coated
- colour: grey, RAL7035
- Lid metallic glossy
- Central screw bolt for fixing up to 4 splice cassettes
- Box can be tilted downwards when open

Standards:

50173-1, EN 61300-3-6, EN 61300-3-61

Technische Daten

Breedte (mm)	482,50
--------------	--------

Technische Daten - Fortsetzung

Hoogte (mm)	43,60
Diepte (mm)	211,50
Nettogewicht (kg)	2,70
Type vezels	50/125µm OM5 multimode
Kleur	RAL 7035
Omgevingstemperatuur min. (°C)	-10
Omgevingstemperatuur max. (°C)	70
Aantal glasvezels	12
Glasvezelaansluiting	LC

Artikeltabelle

BEZEICHNUNG	BEST.NR.
PREMIUM FO Splicebox 19" 1HE 16x pigtails LC 50/125µm OM5 RAL7035	HSLS12SLL
Optionele toebehoren	
FO Splice lasbescherming 60mm (verpakking 10stk.)	HELSP00011
FO Splice lasbescherming 45mm (verpakking 10stk.)	HELSP00010
Glasvezelreinigingsstift LC en MU Suitable for UPC and APC connectors. More than 1,000 cleaning cycles.	HSLSZT001
OPM200 Glasvezeltester voor vermogensmeting	HSLSZT003
FO Patchkabel Duplex LC/LC 50/125µm OM5 LS0H-3 groen 1m LS0H, lime green	HLP2SLL01F
FO Patchkabel Duplex LC/LC 50/125µm OM5 LS0H-3 groen 2m LS0H, lime green	HLP2SLL02F
FO Patchkabel Duplex LC/LC 50/125µm OM5 LS0H-3 groen 3m LS0H, lime green	HLP2SLL03F
FO Patchkabel Duplex LC/LC 50/125µm OM5 LS0H-3 groen 5m LS0H, lime green	HLP2SLL05F