

Emergency luminaire EE 1x1W ERT-LED 230V AC/DC hallway


White, with round cover, ceiling recessed mounting with metal springs and external electronic box, security luminaire to illuminate rescue hallways with a luminaire distance of 18m at a mounting high of 3,5m, with supervision - centrally switchable



Technische Daten

Hoogte (mm)	23,00
Netto diameter (mm)	88,00
Nettogewicht (kg)	0,30
Type verlichting	Noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	Met bewaking en centrale bediening
Productgroep	Verlichting metaal
Design	EE
Afwerking	Wit
Lichtmiddel	ERT-LED (1W)
Lumen	140
Nominale spanning (V)	230VAC 50Hz ±20%; 230VDC ±20%
Beschermingsgraad	IP20
Bevestiging	Plafondinbouw
Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4

Dimensions (mm)

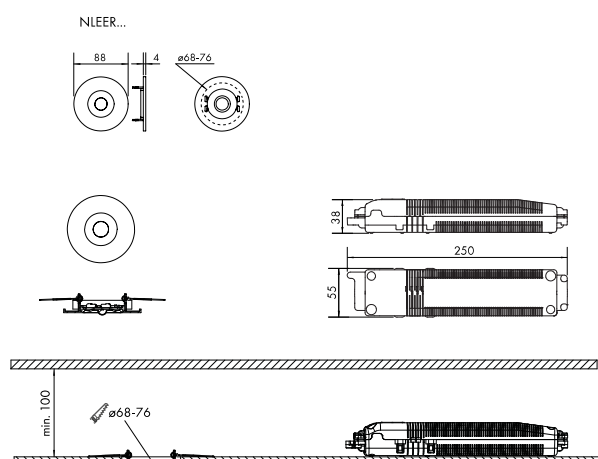

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	6,16	15,89	12,84	4,92	1,80
2,50	6,19	17,44	13,32	5,08	1,75
3,00	5,41	18,17	12,00	5,13	1,60
3,50	4,48	18,19	10,53	5,05	1,34
4,00	3,13	16,75	8,72	4,81	1,00

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emergency luminaire EE 1x1W ERT-LED 230V AC/DC hallway White, with round cover, ceiling recessed mounting with metal springs and external electronic box, security luminaire to illuminate rescue hallways with a luminaire distance of 18m at a mounting high of 3,5m, with supervision - centrally switchable	NLEERF029E
Optionele toebehoren	
EE Sierafdekking noodverlichting vierkant wit	NLEEQWS
EE Sierafdekking noodverlichting vierkant wit	
EE Sierafdekking noodverlichting vierkant antraciet	NLEEQAZ
EE Sierafdekking noodverlichting vierkant antraciet	
EE Sierafdekking noodverlichting rond antraciet	NLEERAZ
EE Sierafdekking noodverlichting rond antraciet	